

# GP1A30R

## OPIC Photointerrupter with Encoder Function

### ■ Features


1. 2-phase (A, B) digital output
2. Possible to use plastic disk
3. High sensing accuracy  
(Disk slit pitch : 0.7mm)
4. TTL compatible output
5. Compact and light

### ■ Applications

1. Electronic typewriters, printers
2. Numerical control machines

### ■ Outline Dimensions

(Unit : mm)

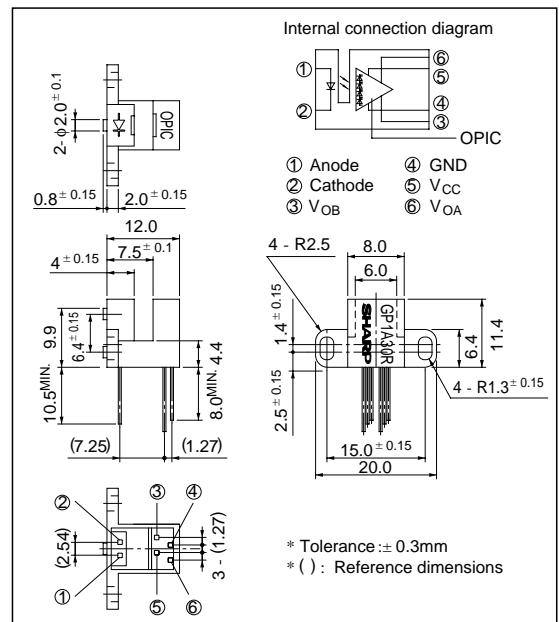

### ■ Absolute Maximum Ratings (Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	65	mA
	* <sup>1</sup> Peak forward current	I <sub>FM</sub>	1	A
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P	100	mW
Output	Supply voltage	V <sub>CC</sub>	7	V
	Low level output current	I <sub>OL</sub>	20	mA
	Power dissipation	P <sub>O</sub>	250	mW
Operating temperature		T <sub>opr</sub>	0 to + 70	°C
Storage temperature		T <sub>sig</sub>	- 40 to + 80	°C
* <sup>2</sup> Soldering temperature		T <sub>sol</sub>	260	°C

\*1 Pulse width &lt;= 100μs, Duty ratio= 0.01

\*2 For 5 seconds

\*<sup>1</sup>OPIC® (Optical IC) is a trademark of the SHARP Corporation.  
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

### ■ Electro-optical Characteristics

(Unless otherwise specified, Ta = 0 to + 70°C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	Ta = 25°C, I <sub>F</sub> = 30mA	-	1.2	1.5	V
	Reverse current	I <sub>R</sub>	Ta = 25°C, V <sub>R</sub> = 3V	-	-	10	μ A
Output	Operating supply voltage	V <sub>CC</sub>		4.5	5.0	5.5	V
	High level output voltage	V <sub>OH</sub>	* <sup>3</sup> V <sub>CC</sub> = 5V, I <sub>F</sub> = 30mA	2.4	4.9	-	V
	Low level output voltage	V <sub>OL</sub>	* <sup>3</sup> I <sub>OL</sub> = 8mA, V <sub>CC</sub> = 5V, I <sub>F</sub> = 30mA	-	0.1	0.4	V
	Supply current	I <sub>CC</sub>	* <sup>3</sup> * <sup>4</sup> I <sub>F</sub> = 30mA, V <sub>CC</sub> = 5V	-	5	20	mA
Transfer characteristics	Duty ratio	* <sup>5</sup> D <sub>A</sub>	V <sub>CC</sub> = 5V, I <sub>F</sub> = 30mA,	20	50	80	%
		* <sup>5</sup> D <sub>B</sub>	* <sup>3</sup> f = 2.5kHz	20	50	80	%
	Response frequency	f <sub>MAX.</sub>	* <sup>3</sup> V <sub>CC</sub> = 5V, I <sub>F</sub> = 30mA	-	-	5	kHz


\*3 Measured under the condition shown in Measurement Conditions.

\*4 In the condition that output A and B are low level.

\*5


$$D_A = \frac{t_{AH}}{t_{AP}} \times 100, \quad D_B = \frac{t_{BH}}{t_{BP}} \times 100$$

## ■ Output Waveforms

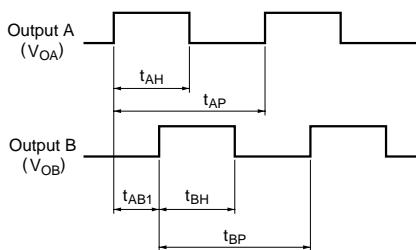


Rotational direction: Counterclockwise when seen from OPIC light detector


**Fig. 1 Forward Current vs. Ambient Temperature**

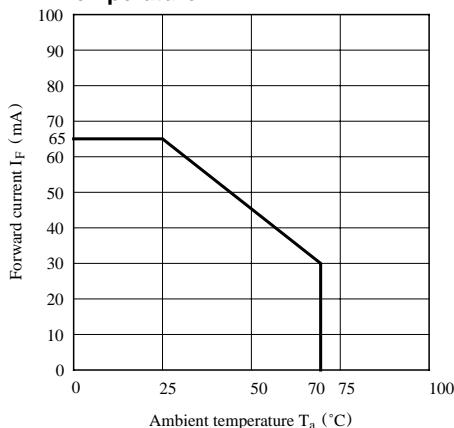


**Fig. 2 Output Power Dissipation vs. Ambient Temperature**

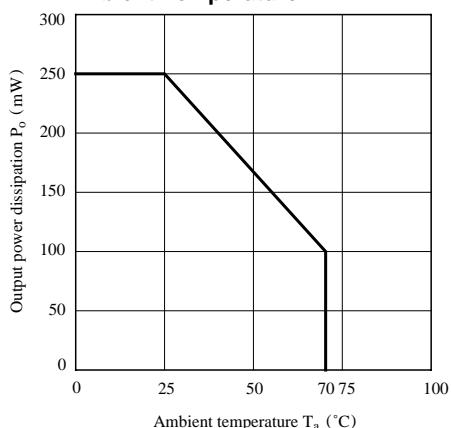

**Fig. 3 Duty Ratio vs. Frequency**

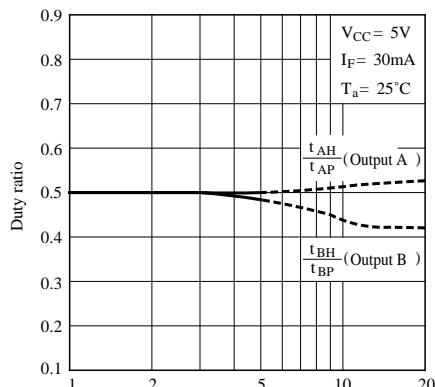


**Fig. 4 Phase Difference vs. Frequency**

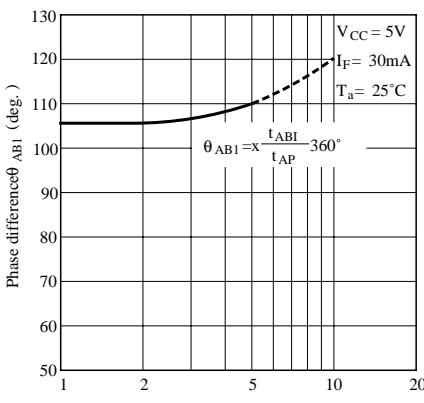


SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182E-MAIL: szss20@163.com


**Fig. 5 Duty Ratio vs. Ambient Temperature**

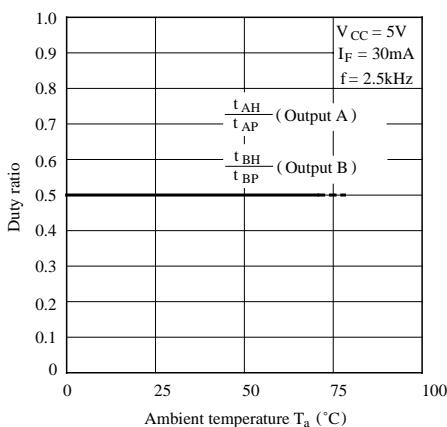


**Fig. 6 Phase Difference vs. Ambient Temperature**

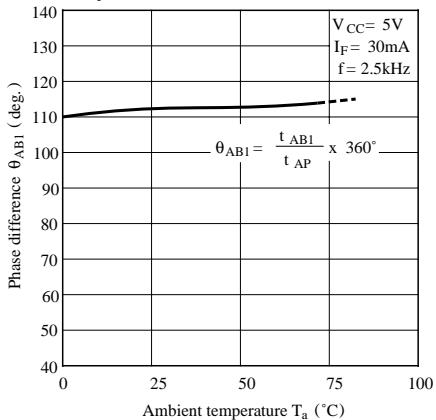


**Fig. 7 Duty Ratio vs. Distance (X direction)**

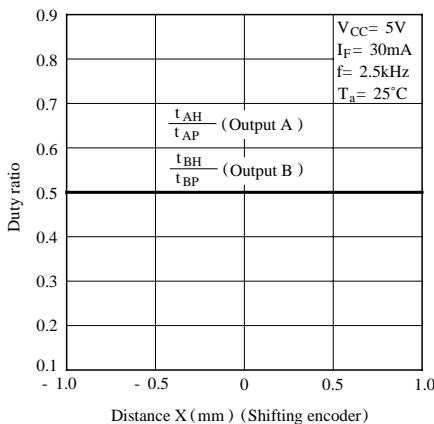


**Fig. 8 Phase Difference vs. Distance (X direction)**


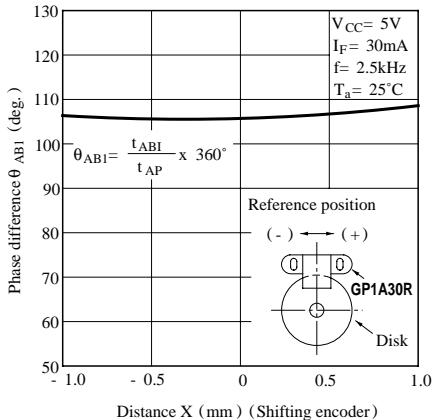


**Fig. 9 Duty Ratio vs. Distance (Y direction)**

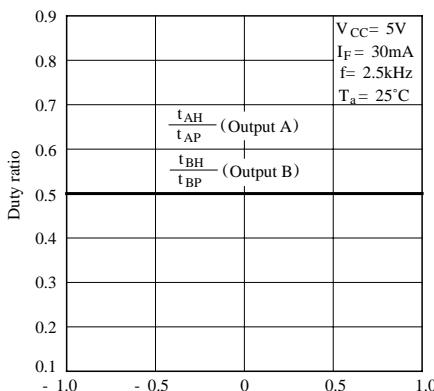


**Fig. 10 Phase Difference vs. Distance (Y direction)**

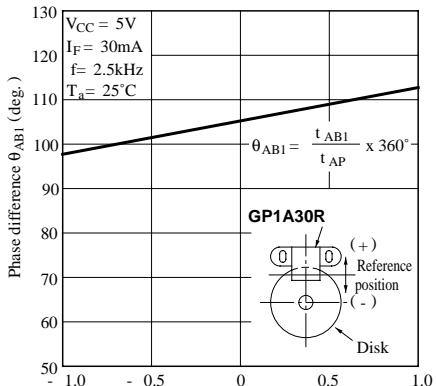

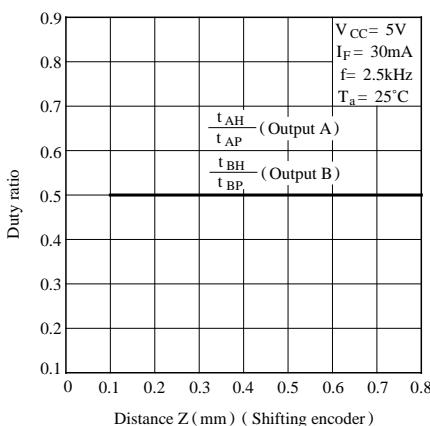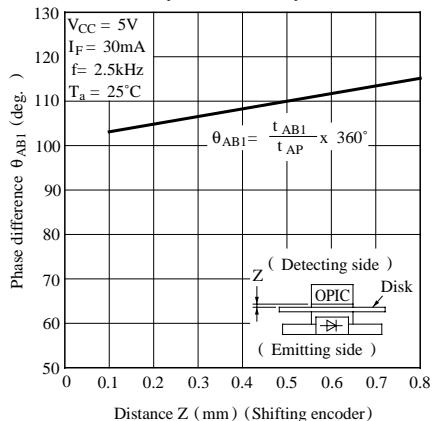**Fig.11 Duty Ratio vs. Distance (Z direction)****Fig.12 Phase Difference vs. Distance (Z direction)**

## ■ Measurement Conditions

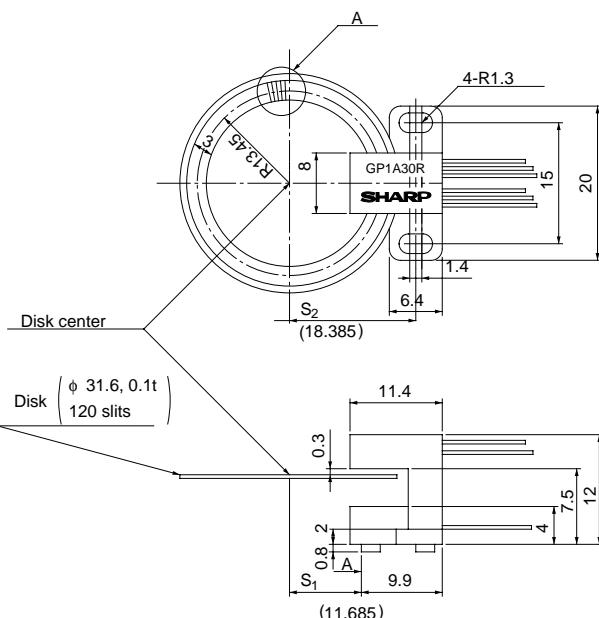

## ■ Precautions for Use

- (1) This module is designed to be operated at  $I_F = 30mA$  TYP.
- (2) Fixing torque : MAX. 0.6Nm (6kgf • cm)
- (3) In order to stabilize power supply line, connect a by-pass capacitor of more than  $0.01\mu F$  between  $V_{CC}$  and GND near the device.

(4) As for other general cautions, refer to the chapter "Precautions for Use".

### <Basic Design>

$R_0$  (distance between the disk center and half point of a slit),  $P$  (slit pitch),  $S_1$  and  $S_2$  (installing position of photointerupter) will be provided by the following equations.

Slit pitch :  $P$  (slit center)

$$R_0 = \frac{N}{120} \times 13.45 \text{ (mm)} \quad N: \text{number of slits}$$


$$P = \frac{2 \times p \times R_0}{N} \text{ (mm)}$$

$$S_1 = R_0 - 1.765 \text{ (mm)}, S_2 = S_1 + 6.7 \text{ (mm)}$$

Note) When the number of slits is changed, values in parenthesis are also changed according to the number.

Enlarged drawing  
of A portion

Slit pitch :  $P$

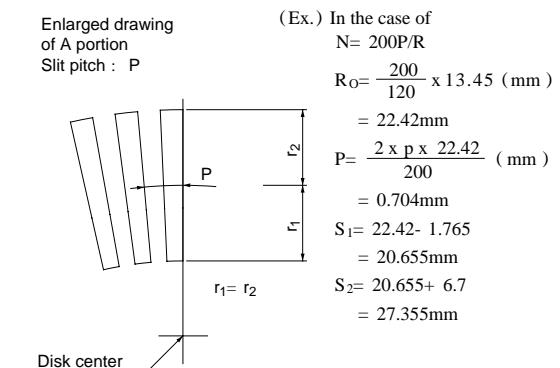

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.