



## DATASHEET Lighting Solutions

### CE260AHX, CE260BHX, and CE260CHX


#### Mercury-Xenon Power Supply Specification

The CE260 power supply is designed to run mercury-xenon arc lamps in a constant-power mode. The output power has two levels: 200W and 300W. The unit is normally at 200W until the High Power remote input is asserted true. The unit then outputs 300W. This is useful for pulsed power applications. EMI line-filtering is built-in to the unit. The CE260BHX is the same as the A-model except it does not have Y-capacitors in the line filter section. The CE260CHX has smaller Y-capacitors to meet the 100  $\mu$ A leakage requirement of many U.S. hospitals.

**Output power:** 190 - 210 Watts, or 285 - 315 Watts, constant power

**Output voltage compliance:** 20.0 to 25.0 V operating, >110 VDC during ignition.

**Output regulation:** output power held to within +/- 5% over all input, output, and environmental conditions.

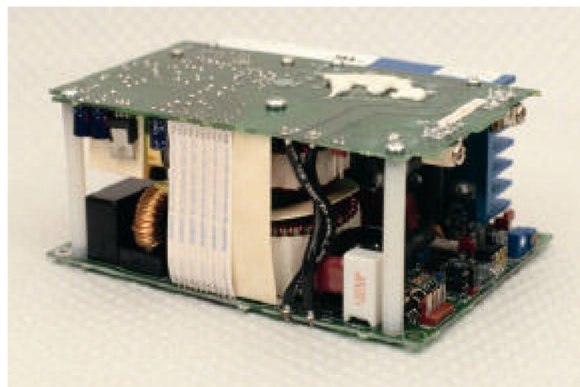

**Output current:** 8.0 to 15.0 Adc

**Output ripple:** <0.7 Ap-p (low power), <1.0 Ap-p (high power)\*

**Efficiency:** >70% at 300 W output, 120 VAC input

**Thermal protection:** ballast is disabled when temperature exceeds 90 deg C. Unit will automatically restart after cooling down.

**Isolated Auxiliary output (UL-rated):** +12V fan power, 800 mA max.

**Optically Isolated Status & Control Connector (UL-rated circuit)**

- Remote Enable
- Lamp Lit Status
- High/Low Power

**Ground Leakage:**

AXE: <300  $\mu$ A

BXE: <10  $\mu$ A

CXE: <100  $\mu$ A

#### Regulatory Compliance:

Approved to UL2601 (E177225). Complies with EN55011 Class B Emissions. CE-marked.



**Line Input:** 100 - 240 VAC, +/- 10%, 47 - 63 Hz, 6.5 Arms max.

**Environmental:** 0 deg C to 50 deg C operating.

**Altitude:** -1000 ft. to 12,000 ft. MSL.

**Weight:** 2.5 lbs (1.14 Kg).

**Dimensions:** 6.50" x 4.65", 2.80" tall (165mm x 118mm, 71mm tall).

#### Ignitor:

25 KV ignition spike. Negative-side ignition.

Minimum repetition rate is 10 strikes/second at all input voltages. Ignition pulses will continue until lamp ignites.

**Ignitor Life:** >500,000 strikes.

\* ripple is measured in a DC to 20 MHz bandwidth.

For a complete listing of our global offices, visit [www.excelitas.com/ContactUs](http://www.excelitas.com/ContactUs)

© 2011 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

**EXCELITAS**  
TECHNOLOGIES

SUNSTAR自动化 <http://www.sensor-ic.com/> TEL: 0755-83376489 FAX:0755-83376182 E-MAIL: szss20@163.com

[www.excelitas.com](http://www.excelitas.com)