

OKI electronic components

OCM4□8, 4□9 SERIES

Dual-Channel/Package General-purpose Type Optical MOS Relay For AC/DC Load

GENERAL DESCRIPTION

The OCM4□8 and OCM4□9 Series are dual-channel, optical MOS relays for AC/DC load. The device is available in the same form factor as single-channel devices, with an 8-pin DIP and SMD-type (gull-wing) package.

FEATURES

- Extremely low voltage control
- High reliability due to non-contact, optical operation
- No chattering or switch bounces
- No mechanical switching noises
- Small size and easy mounting (6-pin plastic DIP or SMD-type [gull-wing] package)



APPLICATIONS

- Telecommunications equipment
- Measurement equipment
- Home electronics
- Automatic meter reading equipment
- Other applications requiring small size or high performance
- Other applications requiring non-contact switches



PIN CONFIGURATION

(Unit: mm)


• DIP Type




• SMD Type (gull-wing)

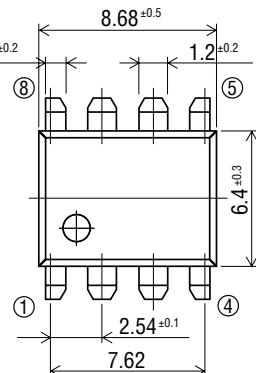


• Through hole (Bottom view)



• Mounting pad (Top view)



• Pin Connection Diagram



- | | |
|---------------------|------------|
| 1: Anode (LED1) | (LED1) |
| 2: Cathode (LED1) | |
| 3: Anode (LED2) | (LED2) |
| 4: Cathode (LED2) | |
| 5: Drain (MOS FET2) | (MOS FET2) |
| 6: Drain (MOS FET2) | |
| 7: Drain (MOS FET1) | (MOS FET1) |
| 8: Drain (MOS FET1) | |

ABSOLUTE MAXIMUM RATINGS

(Ambient temperature Ta=25°C)

Product Name				OCM408 OCM408	OCM418 OCM419	OCM428 OCM429	OCM438 OCM439	OCM448 OCM449			
Parameter	Symbol	Condition	Unit								
Input Characteristics	Continuous Forward Current	I _F		mA	50						
	Derating Factor of Continuous Forward Current	ΔI _F		mA/°C	Refer to [Derating Factor of Continuous Forward Current] of characteristics data						
	Peak Forward Current	I _{FM}	Pulse width 100 μs Cycle 10 ms	A	0.5						
	Reverse Voltage	V _R		V	5						
	Power Dissipation	P _{DL}		mW	75						
Output Characteristics	Load Voltage	V _{OFF}		V	60	100	200	350	400		
	Load Current	I _{ON}		mA	200	150	100	75	50		
	Derating Factor of Load Current	ΔI _{ON}		mA/°C	Refer to [Derating Factor of Load Current] of characteristics data						
	Surge Load Current	I _{SUG}	Pulse width 1 ms 1shot	A	0.5			0.3			
	Power Dissipation	P _D		mW	300						
Isolation Voltage	Total Power Dissipation	P _{tot}		mW	325						
					1500						
					OCM408	OCM418	OCM428	OCM438	OCM448		
					4000						
					OCM409	OCM419	OCM429	OCM439	OCM449		
	Operating Temperature	T _{opr}		°C	−40 to +85						
	Storage Temperature	T _{stg}		°C	−40 to +100						

ELECTRICAL CHARACTERISTICS


(Ambient temperature Ta=25°C)

Product Name				OCM408 OCM409	OCM418 OCM419	OCM428 OCM429	OCM438 OCM439	OCM448 OCM449	
Parameter	Symbol	Condition	Unit						
Input Characteristics	Forward Voltage V _F	I _F =10 mA	Min. Max.	V	1.0				
					1.3				
	Reverse Voltage I _R	V _R =5 V	Max.	μA	10				
	Operation Input Current ^{*1} I _{FA}	I _{ON} =100 mA or Rating	Max.	mA	5				
Output Characteristics	Recovery Input Current I _{FR}	V _{OFF} =Rating I _{ON} =100 μA	Min.	mA	0.2				
	On-resistance R _{ON}	I _F =10 mA I _{ON} =100 mA OCM408, 409, 418, 419 I _{ON} =Rating Time to flow current is within one second	Min.	Ω					
			Typ.		4.0	5.0	12	25	50
			Max.		5.0	7.0	16	35	70
Coupling Characteristics	Off-state Leakage Current ^{*2} I _{OFF}	V _{OFF} =Rating	Max.	μA	1.0				
	Output Terminal Capacitance C _{OUT}	V _{OFF} =50 V f=1 MHz	Typ.	pF	15	10	8	6	5
			Typ.	pF	1.3				
	Input-to-output Capacitance C _{IO}	f=1 MHz	Typ.	pF	0.3				
	Turn-on Time t _{ON} ^{*3}	I _F =10 mA I _{on} =100 mA OCM408, 409 OCM418, 419 OCM428, 429	Typ.	ms	1.0				
			Max.		0.2				
	Turn-off Time t _{OFF} ^{*3}	I _{off} =50 mA OCM438, 439 OCM448, 449	Typ.	ms	1.0				
			Max.						


^{*1} : Can correspond to special specification I_{FA}<3.0 mA^{*2} : Can correspond to special specification I_{OFF}<1.0 nA^{*3} : Can correspond to special specification t_{ON} / t_{OFF}<0.5 ms

TYPICAL CHARACTERISTICS


- Derating Factor of Continuous Forward Current

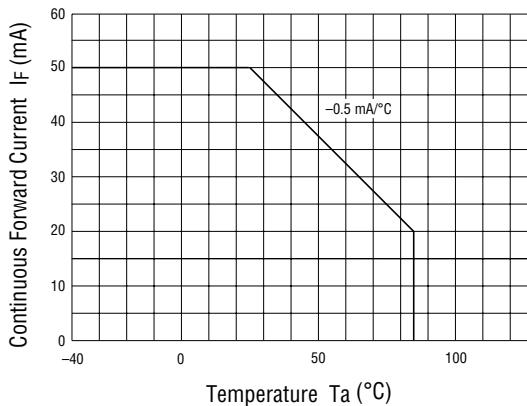


- Derating Factor of Load Current

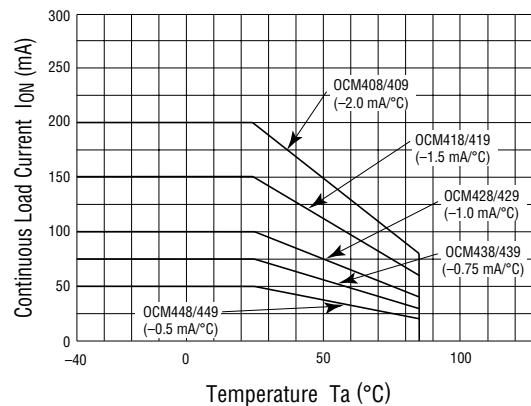


- Operation Input Current vs. Ambient Temperature

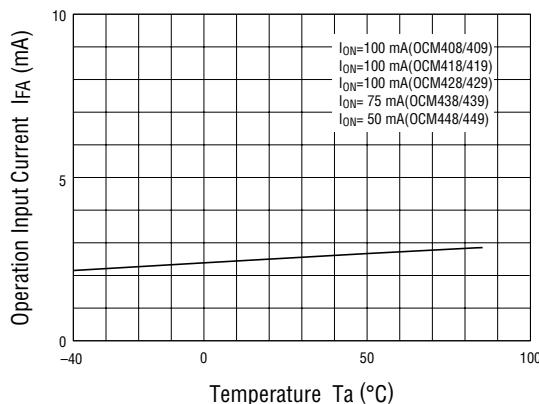


- Recovery Input Current vs. Ambient Temperature

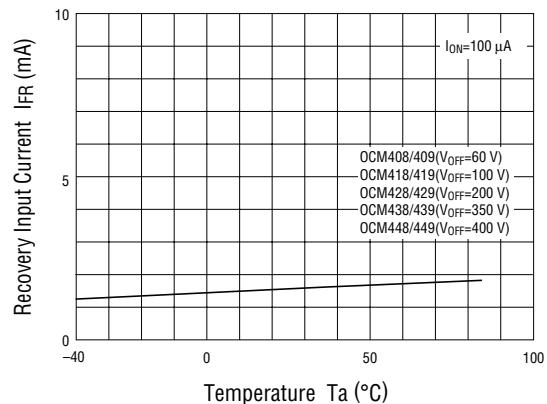


- On-resistance vs. Ambient Temperature 1

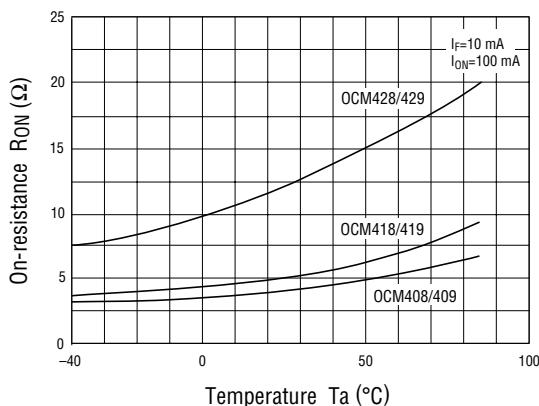


- On-resistance vs. Ambient Temperature 2

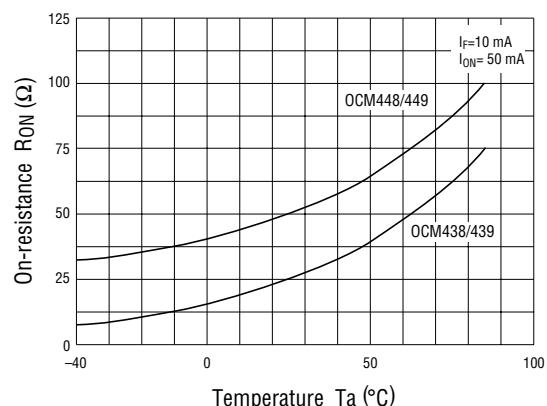


- Turn-on/Turn-off Time vs. Ambient Temperature

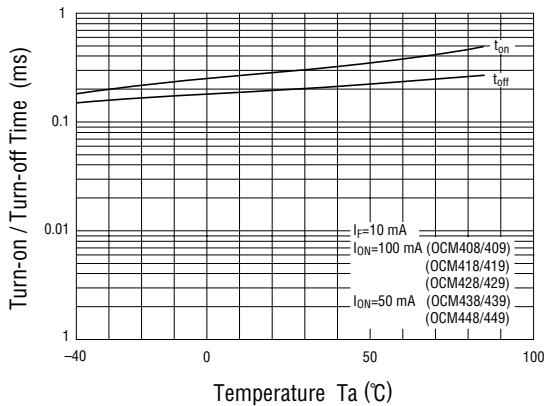


- Continuous Forward Current vs. On-resistance 1

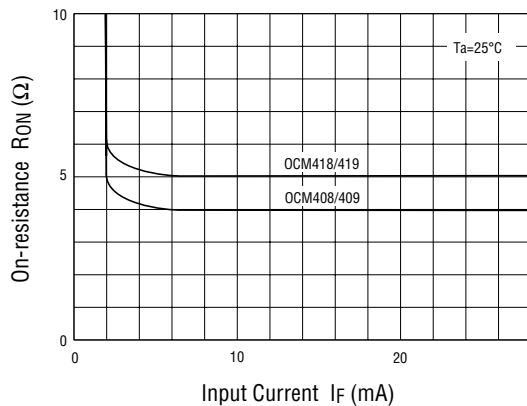


- Continuous Forward Current vs. Turn-on/Turn-off Time

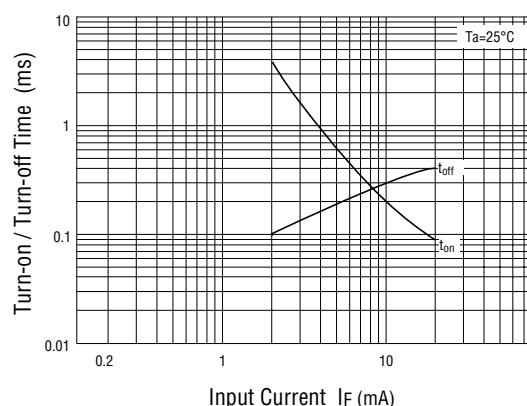


- Off-state Leakage Current vs. Ambient Temperature

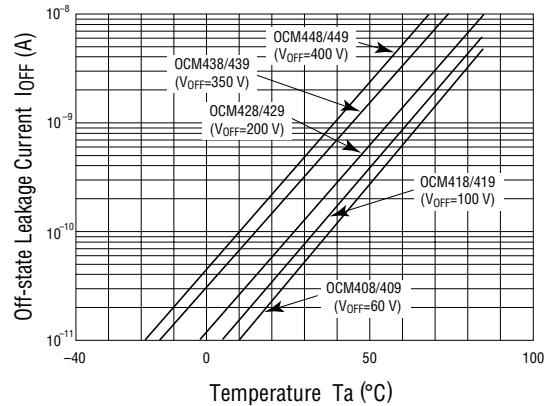


- Continuous Forward Current vs. On-resistance 2

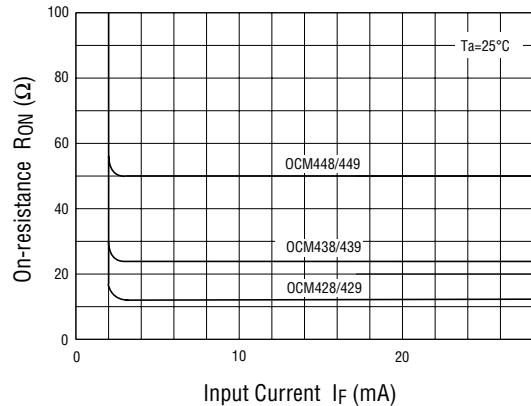

- Output Terminal Capacitance vs. Applied Voltage

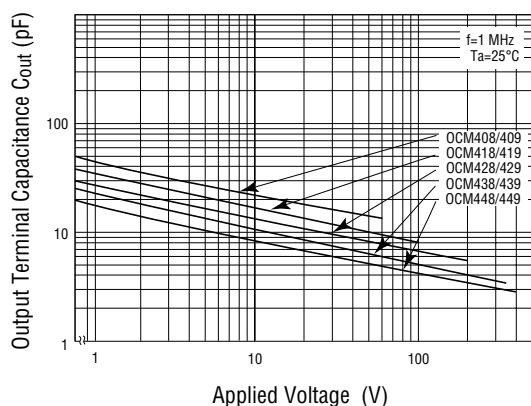

- Load Current vs. Voltage

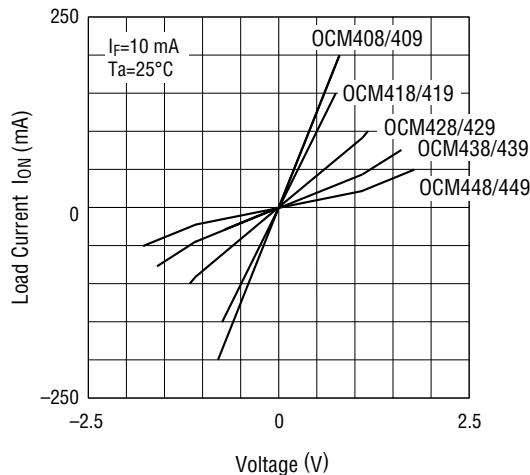

- Example Circuit for Measuring Turn-on/Turn-off Time

