
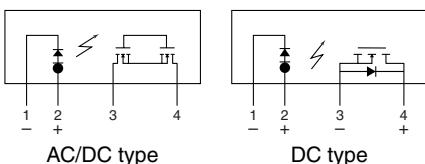


Panasonic

ideas for life

A voltage-sensitive
PhotoMOS relay.
DC load type is available.

Power PhotoMOS
(AQZ100D, 200D)



RoHS Directive compatibility information
<http://www.mew.co.jp/ac/e/environment/>

FEATURES

1. A voltage sensitive power

PhotoMOS relay

Conventional power PhotoMOS relays are connected externally to an input limiting resistor in order to obtain the appropriate LED current. Adding an internal constant-current element renders the input limiting resistor unnecessary, making it possible for the PhotoMOS relay to be voltage driven.

2. Wide range of input voltages

Allows a wide range of input voltages from 4 to 30 V DC. The relay can be used in 5 V, 12 V or 24 V DC systems.

3. Large capacity PhotoMOS relay

Supports the various types of load control, from very small loads to a maximum 2.7 A for the AC/DC dual type, 3.6 A for the DC-only type.

4. Both AC/DC dual types and DC-only types are available

The AC/DC dual type is capable of bi-directional control, and unlike conventional SSRs, does not have to be used differently depending on the load. The DC-only type is well suited for control of DC solenoids and DC motors.

5. High sensitivity, low ON resistance

A maximum 3.6 A load can be controlled with the minimum input voltage of 4 V DC. The ON resistance is also low at 0.09 Ω (AQZ102D).

6. Small scale, slim type, 4-pin SIL

Length 21.0 mm×width 3.5 mm×height 12.5 mm. High precision mounting is possible because of the small 73.5mm² area of the 4-pin SIL.

TYPES

1. AC/DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	2.7 A	AQZ202D	25 pcs.	500 pcs.
100 V	1.8 A			
200 V	0.9 A			
400 V	0.45 A			

2. DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	3.6 A	AQZ102D	25 pcs.	500 pcs.
100 V	2.3 A			
200 V	1.1 A			
400 V	0.6 A			

Notes: Load voltage and current of AC/DC type: Peak AC/DC.

Load voltage and current of DC type: DC.

RATING

1. AC/DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQZ202D	AQZ205D	AQZ207D	AQZ204D	Remarks
Input	Input voltage	V _{IN}	30 V				
	Input reverse voltage	V _{RIN}	5 V				
	Power dissipation	P _{in}	300 mW				
Output	Load voltage (Peak AC)	V _L	60 V	100 V	200 V	400 V	
	Continuous load current (Peak AC)	I _L	2.7 A	1.8 A	0.9 A	0.45 A	
	Peak load current	I _{peak}	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	1.6 W				
Total power dissipation		P _T	1.6 W				
I/O isolation voltage		V _{iso}	2,500 V AC				
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F (4 V ≤ V _{IN} ≤ 6 V) -40°C to +75°C -40°F to +167°F (6 V < V _{IN} ≤ 15 V) -40°C to +60°C -40°F to +140°F (15 V < V _{IN} ≤ 30 V)				Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F				

Power PhotoMOS (AQZ100D, 200D)


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ202D	AQZ205D	AQZ207D	AQZ204D	Remarks
Input	Operate voltage	Typical	V _{Fon}	1.4 V			I _L = 100 mA V _L = 10 V	
		Maximum		4 V				
	Turn off voltage	Minimum	V _{Foff}	0.8 V			I _L = 100 mA V _L = 10 V	
		Typical		1.3 V				
Input current			I _{IN}	6.5 mA			V _{IN} = 5 V	
Output	On resistance	Typical	R _{on}	0.066 Ω	0.180 Ω	0.64 Ω	2.4 Ω	V _{IN} = 5 V I _L = Max. Within 1 s on time
		Maximum		0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω	V _{IN} = 0 V V _L = Max.
	Off state leakage current	Maximum	I _{leak}	10 μA				
Transfer characteristics	Switching speed	Typical	T _{on}	5.8 ms	4.2 ms	2.7 ms	2.3 ms	V _{IN} = 5 V I _L = 100 mA V _L = 10 V
		Maximum		10.0 ms				
	Turn off time*	Typical	T _{off}	0.2 ms		0.1 ms		V _{IN} = 5 V I _L = 100 mA V _L = 10 V
		Maximum		3.0 ms				
	I/O capacitance	Typical	C _{iso}	0.8 pF			f = 1 MHz V _B = 0 V	
		Maximum		1.5 pF				
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ			500 V DC	
Maximum operating speed			—	0.5 cps			V _{IN} = 5 V Duty factor = 50% I _L × V _L = 200 (VA)	
Vibration resistance			—	10 to 55 Hz at double amplitude of 3 mm			2 hours for 3 axes	
Shock resistance			—	4,900 m/s ² {500 G} 1 ms			3 times for 3 axes	

Recommendable Operate voltage V_{IN} = 5 V I_F = 5 to 10 mA.

For type of connection.

*Turn on/off time

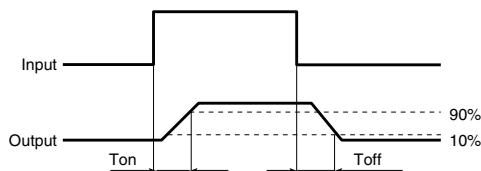

2. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ102D	AQZ105D	AQZ107D	AQZ104D	Remarks		
Input	Input voltage		V _{IN}	30 V						
	Input reverse voltage		V _{RIN}	5 V						
	Power dissipation		P _{in}	300 mW						
Output	Load voltage (DC)		V _L	60 V	100 V	200 V	400 V			
	Continuous load current (DC)		I _L	3.6 A	2.3 A	1.1 A	0.6 A			
	Peak load current		I _{peak}	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V _L = DC		
	Power dissipation		P _{out}	1.35 W						
Total power dissipation			P _T	1.35 W						
I/O isolation voltage			V _{iso}	2,500 V AC						
Temperature limits	Operating		T _{opr}	-40°C to +85°C -40°F to +185°F (4 V ≤ V _{IN} ≤ 6 V) -40°C to +75°C -40°F to +167°F (6 V < V _{IN} ≤ 15 V) -40°C to +60°C -40°F to +140°F (15 V < V _{IN} ≤ 30 V)			Non-condensing at low temperatures			
	Storage		T _{stg}	-40°C to +100°C -40°F to +212°F						


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ102D	AQZ105D	AQZ107D	AQZ104D	Remarks	
Input	Operate voltage		V _{Fon}	1.4 V			$I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$		
				4 V					
Output	Turn off voltage		V _{Foff}	0.8 V			$I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$		
				1.3 V					
Input current			I _{IN}	6.5 mA			$V_{IN} = 5 \text{ V}$		
Transfer characteristics	On resistance		R _{on}	0.033 Ω	0.090 Ω	0.33 Ω	1.23 Ω	$V_{IN} = 5 \text{ V}$ $I_L = \text{Max.}$ Within 1 s on time	
				0.09 Ω	0.17 Ω	0.55 Ω	1.6 Ω	$V_{IN} = 0 \text{ V}$ $V_L = \text{Max.}$	
Off state leakage current			I _{leak}	10 μA					
Transfer characteristics	Switching speed	Turn on time*	T _{on}	3.3 ms	2.2 ms	1.5 ms	1.2 ms	$V_{IN} = 5 \text{ V}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$	
		Turn off time*		10.0 ms					
	I/O capacitance	Typical	C _{iso}	0.2 ms			0.1 ms	$V_{IN} = 5 \text{ V}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$	
		Maximum		3.0 ms					
Initial I/O isolation resistance			R _{iso}	1,000 MΩ			500 V DC		
Maximum operating speed			—	0.5 cps			$V_{IN} = 5 \text{ V}$ Duty factor = 50% $I_L \times V_L = 200 \text{ (VA)}$		
Vibration resistance			Minimum	10 to 55 Hz at double amplitude of 3 mm			2 hours for 3 axes		
Shock resistance			Minimum	4,900 m/s ² {500 G}1 ms			3 times for 3 axes		

Recommendable Operate voltage $V_{IN} = 5 \text{ V}$.

For type of connection.

*Turn on/off time

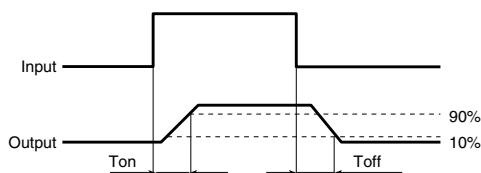


- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F;

V_{IN} : Input voltage; I_L (derate): Load current (derate); I_L : Absolute maximum ratings of continuous load current

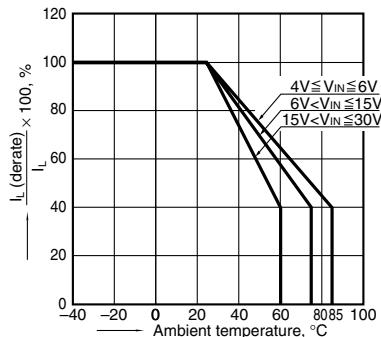


2.-1) Load current vs. ambient temperature characteristics in adjacent mounting

Input voltage: 4V ≤ V_{IN} ≤ 6V;
I_L (derate): Load current (derate); I_L: Absolute maximum ratings of continuous load current; l : Adjacent mounting pitch

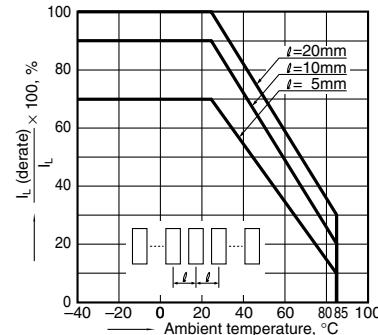

2.-2) Load current vs. ambient temperature characteristics in adjacent mounting


Input voltage: 6V < V_{IN} ≤ 15V;
I_L (derate): Load current (derate); I_L: Absolute maximum ratings of continuous load current; l : Adjacent mounting pitch

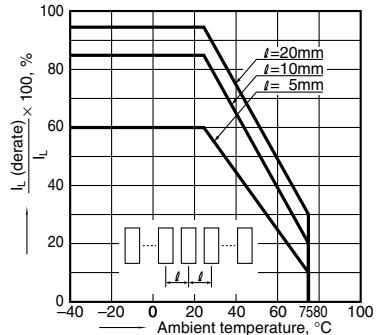

2.(3) Load current vs. ambient temperature characteristics in adjacent mounting

Input voltage: $15V < V_{IN} \leq 30V$;


I_L (derate): Load current (derate); I_L : Absolute maximum ratings of continuous load current; ℓ : Adjacent mounting pitch

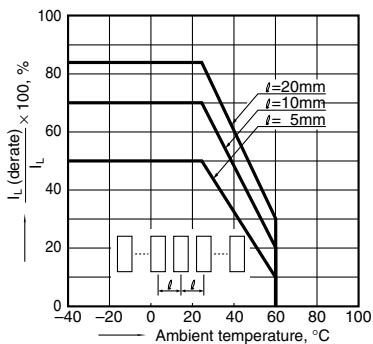

3.(3) On resistance vs. ambient temperature characteristics (DC type)

Input voltage: 5 V;


Continuous load current: 3.6 A (DC) (AQZ102D)
2.3 A (DC) (AQZ105D)

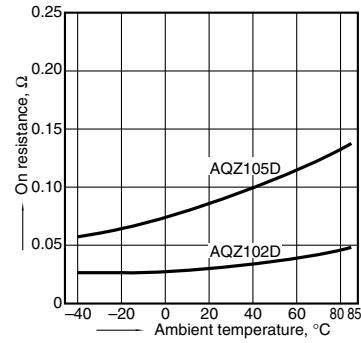

4.(2) Turn on time vs. ambient temperature characteristics (DC type)

Input voltage: 5 V; Load voltage: 10 V (DC);


Continuous load current: 100 mA (DC)

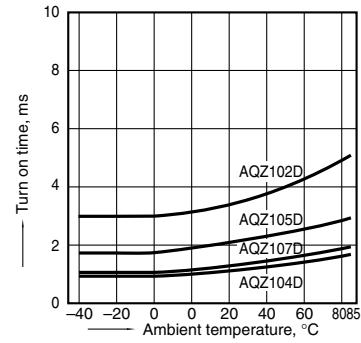

6. Operate voltage vs. ambient temperature characteristics

Load voltage: 10 V (DC);


Continuous load current: 100 mA (DC)

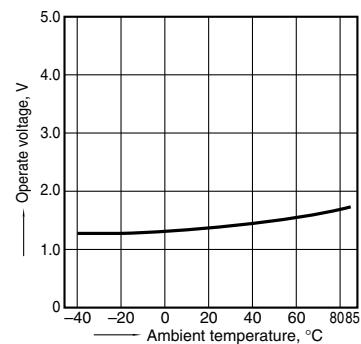

3.(1) On resistance vs. ambient temperature characteristics (AC/DC type)

Input voltage: 5 V;


Continuous load current: 2.7 A (DC) (AQZ202D)
1.8 A (DC) (AQZ205D)

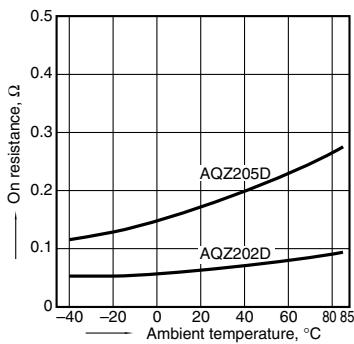

3.(4) On resistance vs. ambient temperature characteristics (DC type)

Input voltage: 5 V;


Continuous load current: 1.1 A (DC) (AQZ107D)
0.6 A (DC) (AQZ104D)

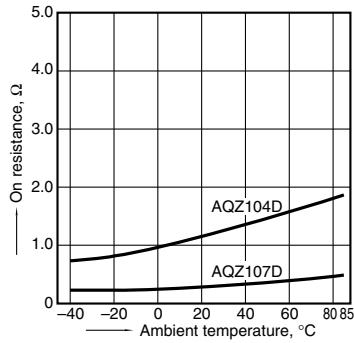

5.(1) Turn off time vs. ambient temperature characteristics (AC/DC type)

Input voltage: 5 V; Load voltage: 10 V (DC);


Continuous load current: 100 mA (DC)

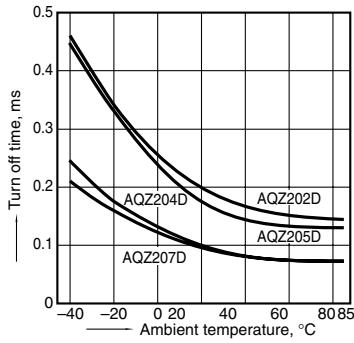

7. Turn off voltage vs. ambient temperature characteristics

Load voltage: 10 V (DC);


Continuous load current: 100 mA (DC)

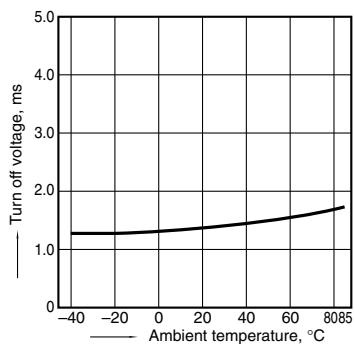

3.(2) On resistance vs. ambient temperature characteristics (AC/DC type)

Input voltage: 5 V;

Continuous load current: 0.9 A (DC) (AQZ207D)
0.45 A (DC) (AQZ204D)

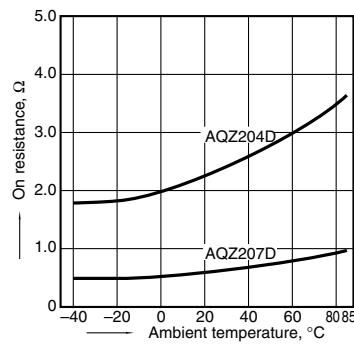


4.(1) Turn on time vs. ambient temperature characteristics (AC/DC type)

Input voltage: 5 V;

Load voltage: 10 V (DC);


Continuous load current: 100 mA (DC)

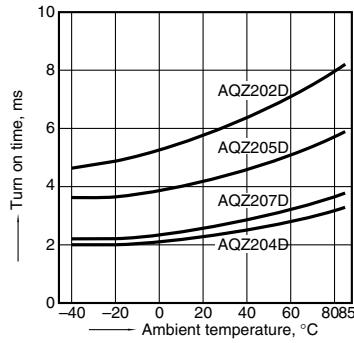

5.(2) Turn off time vs. ambient temperature characteristics (DC type)


Input voltage: 5 V; Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC)

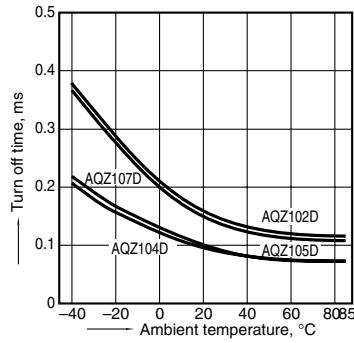


8. Input current vs. ambient temperature characteristics


Input voltage: 5 V

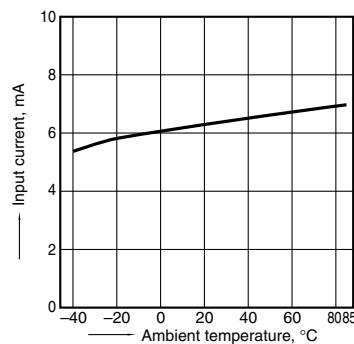


9.-1) Current vs. voltage characteristics of output at MOS portion (AC/DC type)
 Ambient temperature: 25°C 77°F




9.-2) Current vs. voltage characteristics of output at MOS portion (DC type)
 Ambient temperature: 25°C 77°F




10. Input current vs. input voltage characteristics
 Ambient temperature: 25°C 77°F

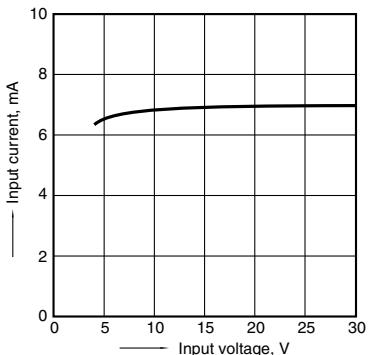


11.-1) Off state leakage current vs. load voltage characteristics
 Ambient temperature: 25°C 77°F

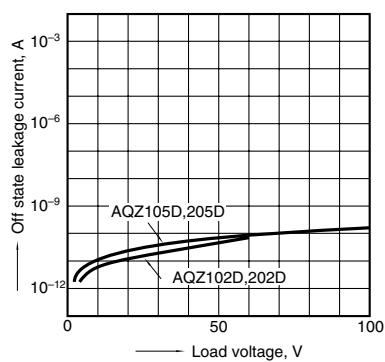


11.-2) Off state leakage current vs. load voltage characteristics
 Ambient temperature: 25°C 77°F

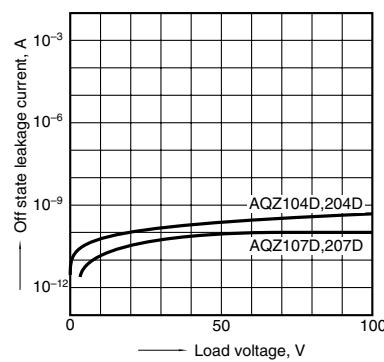


12. Maximum operating speed vs. load voltage × load current characteristics
 Input voltage: 5V; Ambient temperature: 25°C 77°F

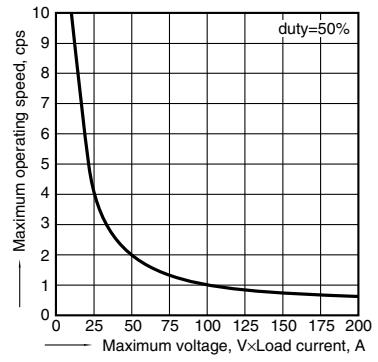

13.-1) Output capacitance vs. applied voltage characteristics (AC/DC type)
 Frequency: 1 MHz; Ambient temperature: 25°C 77°F


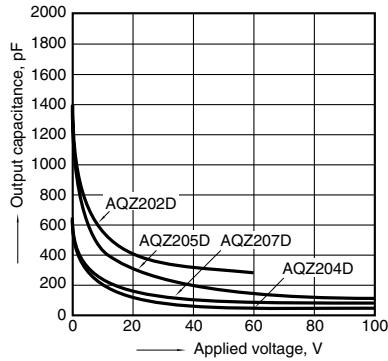


13.-2) Output capacitance vs. applied voltage characteristics (DC type)
 Frequency: 1 MHz; Ambient temperature: 25°C 77°F

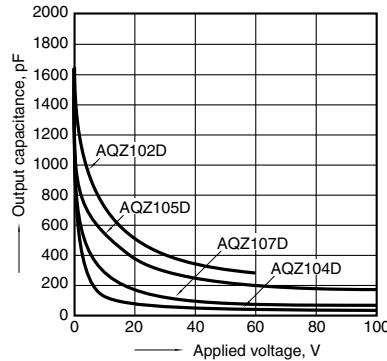


ACCESSORY

Socket

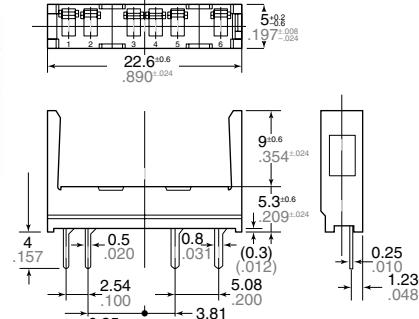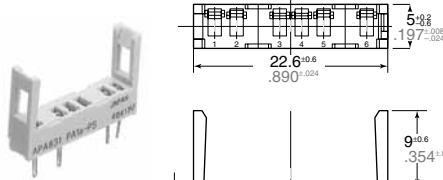


PA1a-PS

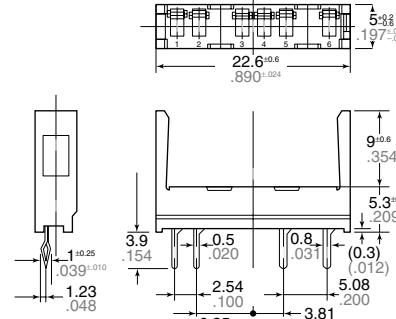


PA1a-PS-H

PC board pattern (BOTTOM VIEW) Standard type



Self clinching type



Tolerance: ±0.1 ±.004