**RPI-304** 

## Sensors

# Photointerrupter, double-layer mold type RPI-304

The RPI-304 is standard tall package photointerrupter. This product can be fix on PCB by snap.


#### Application

Reel count sensor for VCR

#### Features

- 1) Tall package (Optical axis 22.6mm)
- 2) Small package due to the double-layer mold
- 3) PPS package for heat resistance

# ●External dimensions (Units : mm)



#### ● Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit			
Input(LED)	Forward current	lF	50	mA			
	Reverse voltage	VR	5	V			
	Power dissipation	Po	80	mW			
Output (photo- (transistor)	Collector-emitter voltage	Vceo	30	V			
	Emitter-collector voltage	Veco	4.5	V			
	Collector current	Ic	30	mA			
	Collector power dissipation	Pc	80	mW			
Operating temperature		Topr	-25~+85	°C			
Storage temperature		Tstg	-30~+85	°C			

## Sensors

#### ●Electrical and optical characteristics (Ta = 25°C)

Parameter		Symbol	Min.	Тур.	Max.	Unit	Conditions
Input charac- teristics	Forward voltage	VF	-	1.3	1.6	V	I==50mA
	Reverse current	lr	-	-	10	μΑ	V <sub>R</sub> =5V
Output charac- teristics	Dark current	Iceo	-	-	0.5	μΑ	V <sub>CE</sub> =10V
	Peak sensitivity wavelength	λр	-	800	-	nm	_
Transfer charac- teristics	Collector current	Ic	0.2	0.7	2.0	mA	VcE=5V, Ir=20mA
	Collector-emitter saturation voltage	VCE(sat)	-	_	0.4	V	I <sub>F</sub> =20mA, I <sub>C</sub> =0.1mA
	Response time	tr•tf	-	10	-	μs	Vcc=5V, I <sub>F</sub> =20mA, R <sub>L</sub> =100Ω

#### Electrical and optical characteristic curves




Fig.1 Power dissipation / collector power dissipation vs. ambient temperature




Fig.2 Forward current vs. forward voltage




Fig.3 Collector current vs. forward current




Fig.4 Dark current vs. ambient temperature




Fig.5 Relative output vs. ambient temperature






Fig.6 Relative output vs. distance

# **RPI-304**

## Sensors

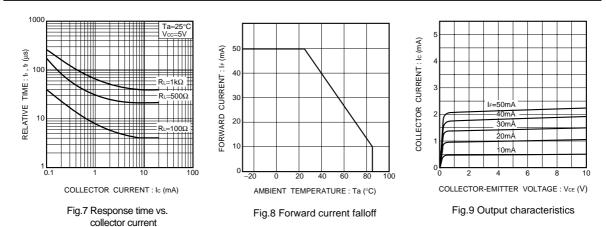



- td: Delay time
- tr: Rise time (time for output current to rise from 10% to 90% of peak current)
- tr: Fall time (time for output current to fall from 90% to 10% of peak current)

Fig.10 Response time measurement circuit

# **Appendix**

#### **Notes**

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
  use and operation. Please pay careful attention to the peripheral conditions when designing circuits
  and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
  otherwise dispose of the same, no express or implied right or license to practice or commercially
  exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
   Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.



Appendix1-Rev1.0