


NO-AE Nitric Oxide Sensor High Concentration



PATENTED

Figure 1 NO-AE Schematic Diagram

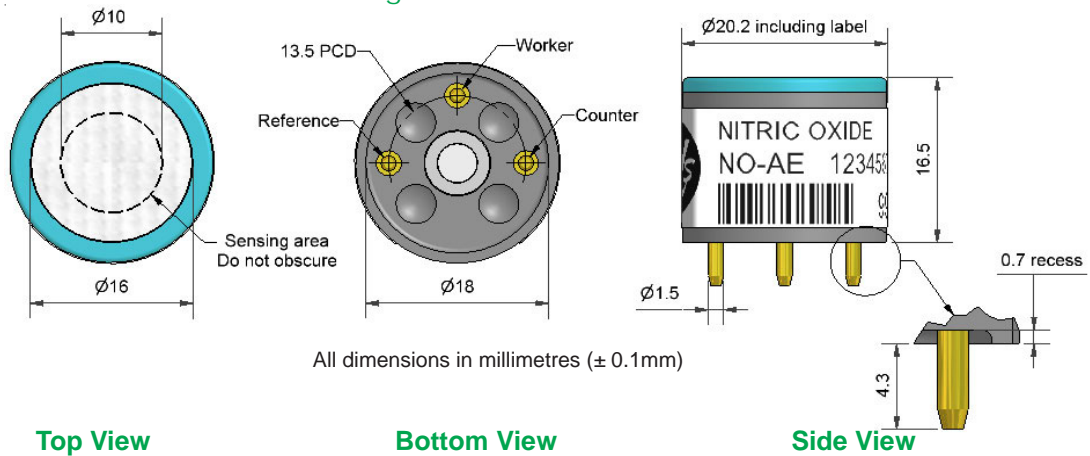

Top View

Bottom View

Side View

PERFORMANCE	Sensitivity	nA/ppm in 250ppm NO	60 to 100
	Response time	t ₉₀ (s) from zero to 250ppm NO	<45
	Zero current	ppm equivalent in zero air	<5
	Resolution	RMS noise (ppm equivalent)	<1
	Range	ppm NO limit of performance warranty	5,000
	Linearity	ppm error at full scale, linear at zero and 1000ppm NO	<250
	Overgas limit	maximum ppm for stable response to gas pulse	10,000
LIFETIME	Zero drift	ppm equivalent change/year in lab air	nd
	Sensitivity drift	% change/year in lab air, monthly test	nd
	Operating life	months until 80% original signal (24 month warranted)	>24
ENVIRONMENTAL	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 50ppm	83 to 95
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 50ppm	101 to 107
	Zero @ -20°C	ppm equivalent change from 20°C	±2.5
	Zero @ 50°C	ppm equivalent change from 20°C	10 to 20
CROSS SENSITIVITY	H ₂ S sensitivity	% measured gas @ 20ppm	<50
	NO ₂ sensitivity	% measured gas @ 50ppm	<20
	Cl ₂ sensitivity	% measured gas @ 10ppm	<25
	SO ₂ sensitivity	% measured gas @ 20ppm	<5
	CO sensitivity	% measured gas @ 400ppm	<0.1
	H ₂ sensitivity	% measured gas @ 400ppm	<0.1
	C ₂ H ₄ sensitivity	% measured gas @ 400ppm	<0.1
	NH ₃ sensitivity	% measured gas @ 20ppm	<0.1
CO ₂ sensitivity	% measured gas @ 5% Vol	<0.1	

KEY SPECIFICATIONS

Temperature range	°C	-30 to +50
Pressure range	kPa	80 to 120
Humidity range	% rh continuous	15 to 90
Storage period	months @ 3 to 20°C (stored in sealed pot)	6
Bias voltage	mV (working electrode potential is above ground)	+300
Load resistor	Ω (recommended)	10 to 47
Weight	g	<6




NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

Technical Specification

NO-AE Performance Data

Technical Specification

Figure 2 Response to 250ppm NO

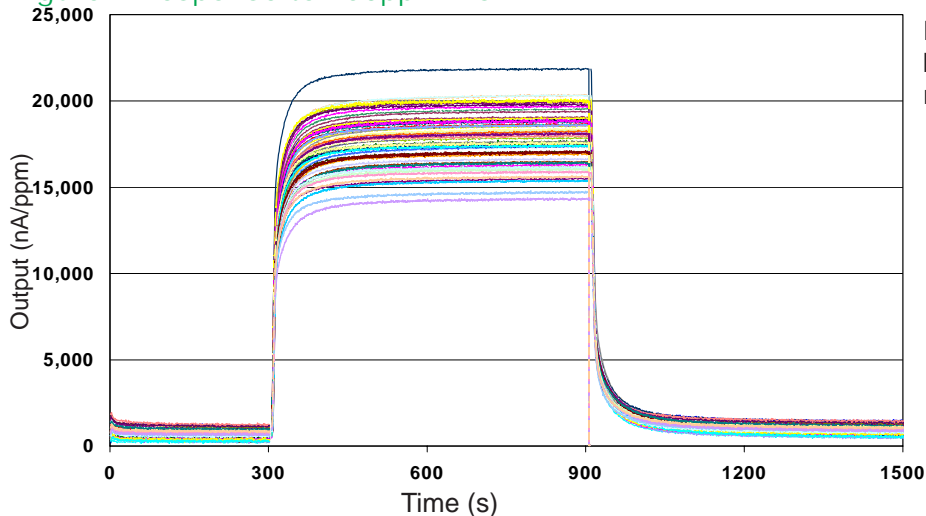

Response from a typical batch of sensors shows repeatable performance

Figure 3 Response to Humidity Transients


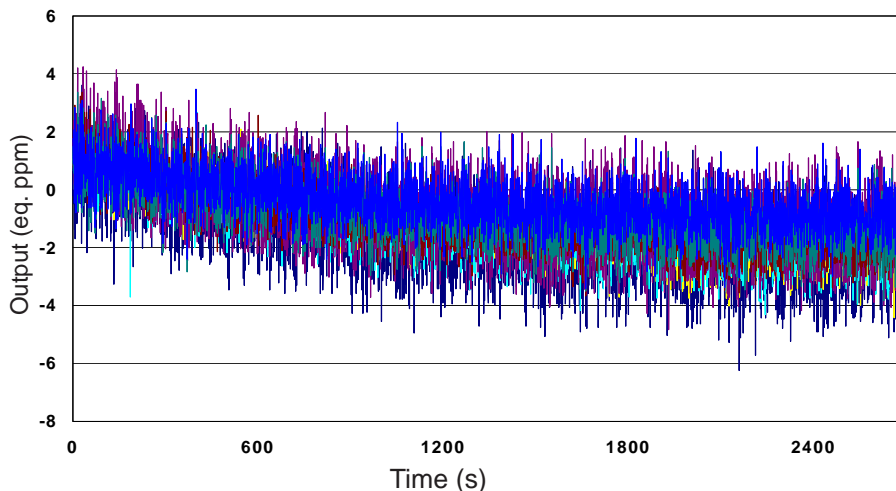


Figure 3 shows the insensitivity of the NO-AE to rapid humidity transients from 0% to 90% rh.

Figure 4 Response up to 1% NO

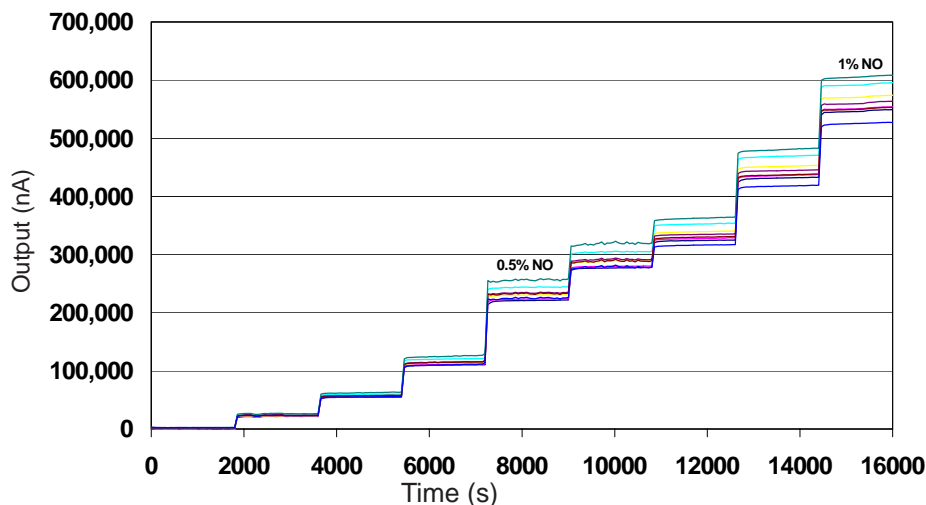

The NO-AE shows fast, stable response from 0 to 1% NO