

OKI electronic components

OCM2□4, 2□5 SERIES

Low Output-capacitance Type Optical MOS Relay For AC/DC Load

GENERAL DESCRIPTION

The OCM2□4 and OCM2□5 Series are optical MOS relays for AC/DC load that provide high-speed response and are capable of handling high-frequency signals. The input portion is an infrared light emitting diode. The output portion uses a combination of low-capacitance VD-MOS (Vertical Diffusion MOS) FETs and photodiode arrays. The device is encased in an extremely small 6-pin plastic DIP or SMD-type (gull-wing) package.

The optical MOS relay switch may be used in applications that currently use mechanical relay switches, but offers smaller size, noise-free switching, and electronic circuit compatibility because of its non-mechanical operation. Optical MOS relay switches also dissipate less power than equivalent bipolar devices at lower switching frequencies.

FEATURES

- Infinitesimally small control voltage
- Excellent high-frequency characteristics (>30 dB isolation at 10 MHz)
- High-speed switching response of 200 μ s or less
- Low leakage current
- No chattering or switch bounces
- No mechanical switching noises
- Small size and easy mounting (6-pin plastic DIP or SMD-type[gull-wing] package)


APPLICATIONS

- Measurement equipment
- Audio-visual equipment
- Home electronics
- Automatic meter reading equipment
- Other applications requiring small size or high performance
- Other applications requiring non-contact switches


PIN CONFIGURATION

(Unit: mm)


• DIP Type

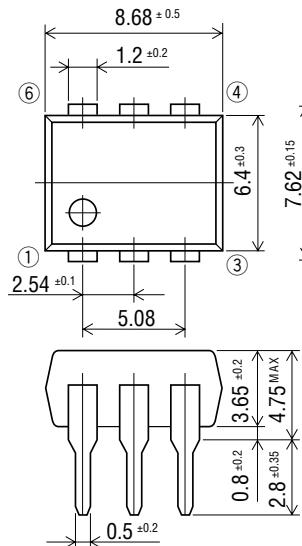


• SMD Type (gull-wing)

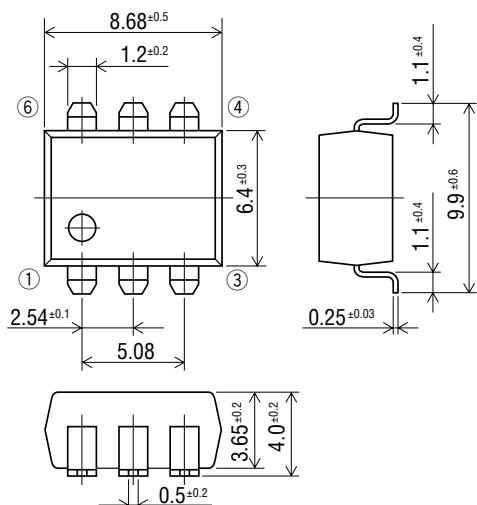


• Through hole (Bottom view)

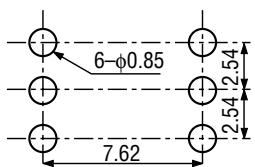

• Mounting pad (Top view)



• Pin Connection Diagram

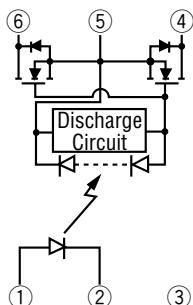

- | | |
|------------|-----------|
| 1: Anode | (LED) |
| 2: Cathode | (LED) |
| 3: NC | |
| 4: Drain | (MOS FET) |
| 5: Source | (MOS FET) |
| 6: Drain | (MOS FET) |

ABSOLUTE MAXIMUM RATINGS

(Ambient temperature Ta=25°C)

Product Name				OCM204	OCM214	OCM224	OCM244	
				OCM205	OCM215	OCM225	OCM245	
Input Characteristics	Continuous Forward Current	I _F		mA	50			
	Derating Factor of Continuous Forward Current	ΔI _F		mA/°C	Refer to [Derating Factor of Continuous Forward Current] of characteristics data			
	Peak Forward Current	I _{FM}	Pulse width 100 μs Cycle 10 ms	A	0.5			
	Reverse Voltage	V _R		V	5			
	Power Dissipation	P _{DL}		mW	75			
Output Characteristics	Load Voltage	V _{OFF}		V	60	100	200	400
	Load Current	I _{ON}		mA	80	50	40	15
	Derating Factor of Load Current	ΔI _{ON}		mA/°C	Refer to [Derating Factor of Load Current] of characteristics data			
	Surge Load Current	I _{SUG}	Pulse width 1 ms 1shot	A	0.1	0.07	0.025	
	Power Dissipation	P _D		mW	300			
Total Power Dissipation				mW	325			
Isolation Voltage				V(rms)	1500			
					OCM204	OCM214	OCM224	OCM244
					4000			
Operating Temperature				OCM205	OCM215	OCM225	OCM245	
Storage Temperature				°C	-40 to +85			
				°C	-40 to +100			

ELECTRICAL CHARACTERISTICS


(Ambient temperature Ta=25°C)

Product Name				Unit	OCM204	OCM214	OCM224	OCM244
Parameter	Symbol	Condition	Unit		OCM205	OCM215	OCM225	OCM245
Input Characteristics	Forward Voltage Forward Current: I _F =10 mA	V _F	Min. Max.	V	1.0			
					1.3			
	Reverse Voltage Reverse Current: I _R	V _R =5 V	Max.	μA	10			
	Operation Input Current *1 Operation Input Current: I _{FA}	I _{ON} =100 mA	Max.	mA	5			
Output Characteristics	Recovery Input Current Recovery Input Current: I _{FR}	V _{OFF} =Rating I _{ON} =100 mA	Min.	mA	0.2			
	On-resistance On-resistance: R _{ON}	I _F =10 mA I _{ON} =Rating Time to flow current is within one second	Min.	Ω	20	40	100	300
			Typ.		30	65	150	600
			Max.		40	90	200	900
Coupling Characteristics	Off-state Leakage Current*2 Off-state Leakage Current: I _{OFF}	V _{OFF} =Rating	Max.	nA	1.0			
	Output Terminal Capacitance Output Terminal Capacitance: C _{OUT}	V _{OFF} =50 V f=1 MHz	Typ.	pF	7			
					1.3			
	Input-to-output Capacitance Input-to-output Capacitance: C _{IO}	f=1 MHz	Typ.	pF	30			
Turn-on Time	t _{ON}	I _F =10 mA I _{ON} = OCM204, 205: 10mA OCM214, 215: 10mA OCM224, 225: 4mA OCM244, 245: 1mA	Typ.	μs	200			
			Max.		60			
Turn-off Time	t _{OFF}	I _F =10 mA I _{ON} = OCM204, 205: 10mA OCM214, 215: 10mA OCM224, 225: 4mA OCM244, 245: 1mA	Typ.	μs	200			
			Max.		200			


*1 : Can correspond to special specification I_{FA}< 3.0 mA*2 : Can correspond to special specification I_{FA}< 0.1 nA

TYPICAL CHARACTERISTICS


- Derating Factor of Continuous Forward Current

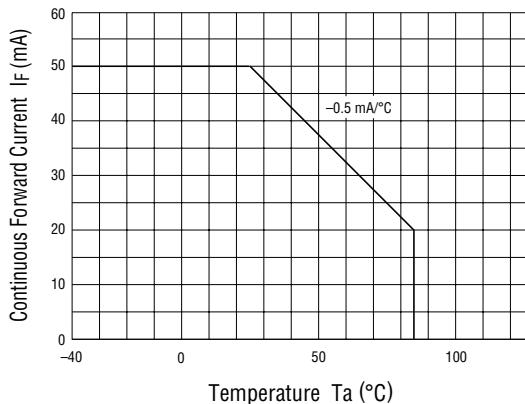


- Operation Input Current vs. Ambient Temperature

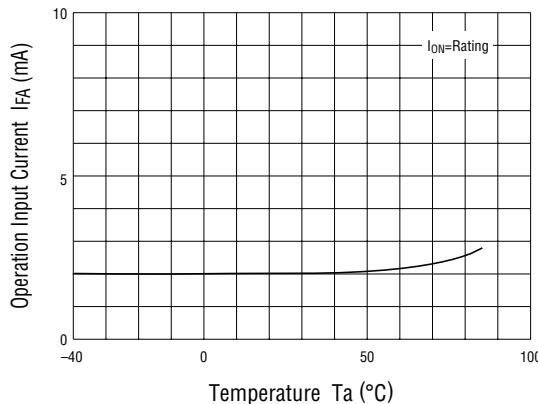


- On-resistance vs. Ambient Temperature 1

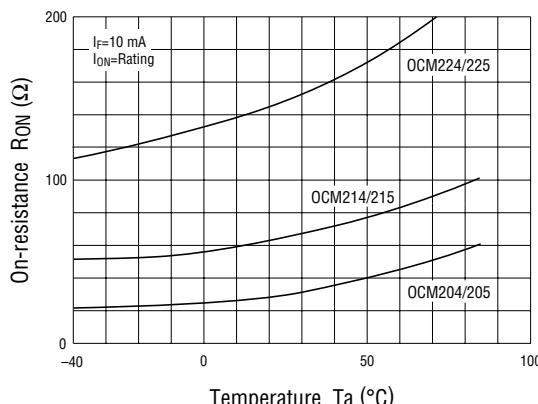


- Derating Factor of Continuous Load Current

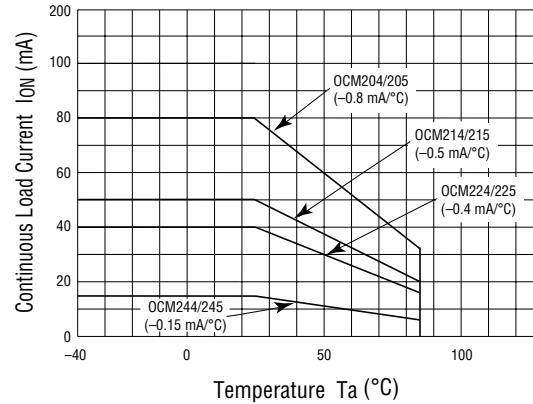


- Recovery Input Current vs. Ambient Temperature

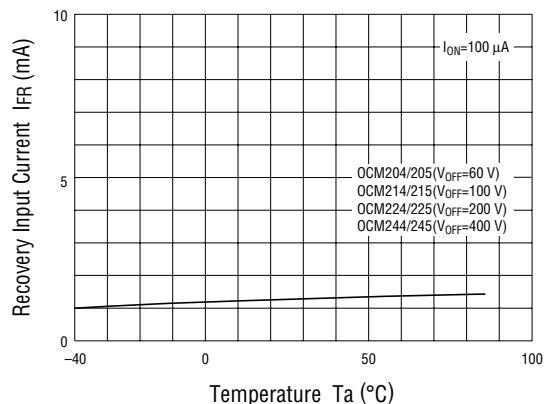


- On-resistance vs. Ambient Temperature 2

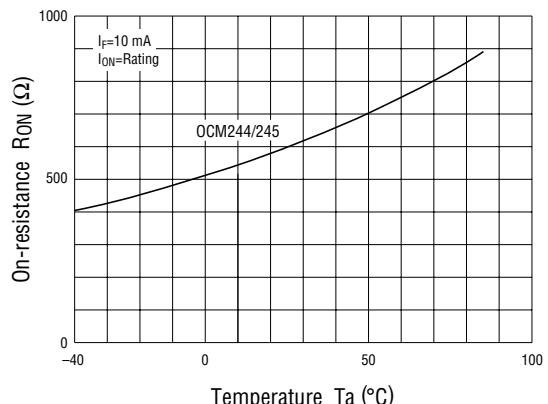


- Turn-on/Turn-off Time vs. Ambient Temperature

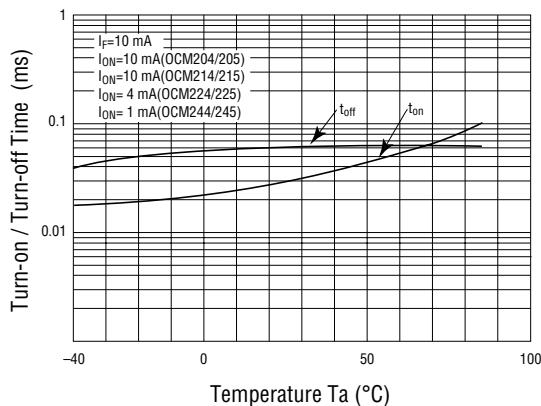


- Off-state Leakage Current vs. Ambient Temperature

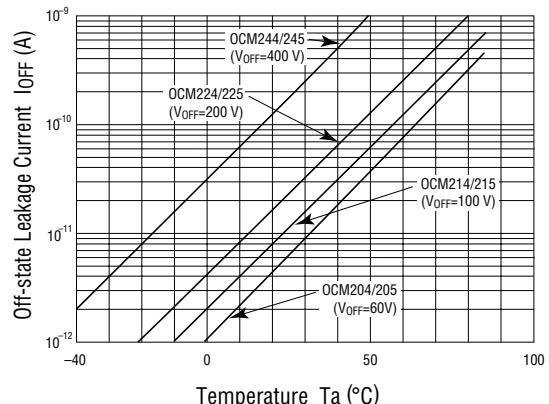


- Continuous Foward Current vs. On-resistance 1

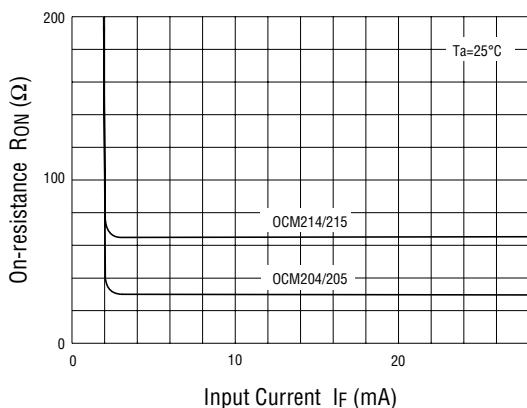


- Continuous Foward Current vs. On-resistance 2

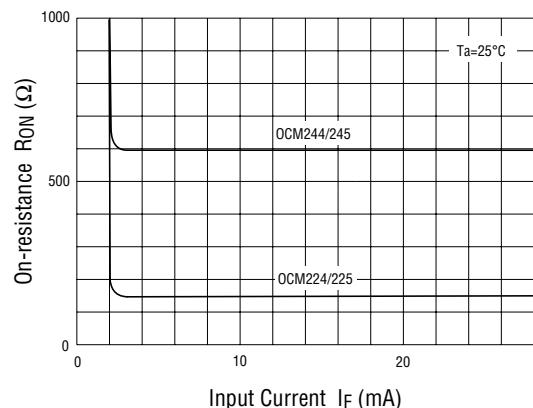


- Continuous Foward Current vs. Turn-on/Turn-off Time

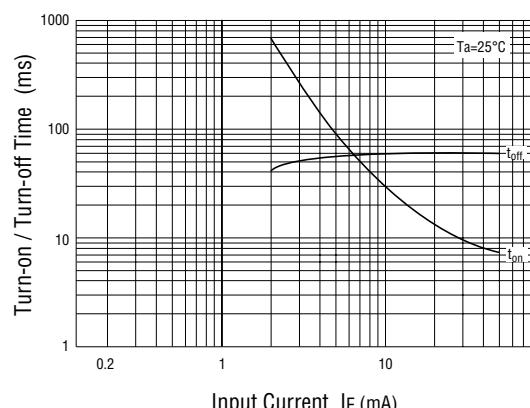


- Output Terminal Capacitance vs. Applied Voltage

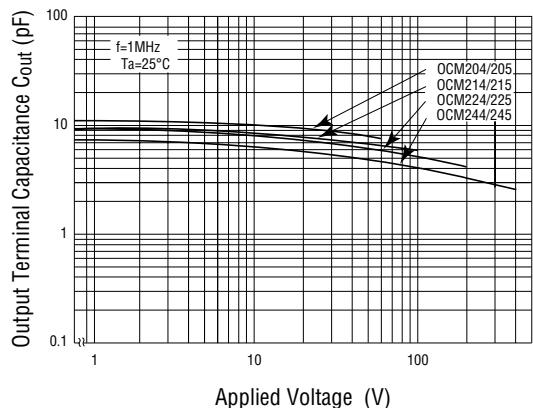

- Isolation

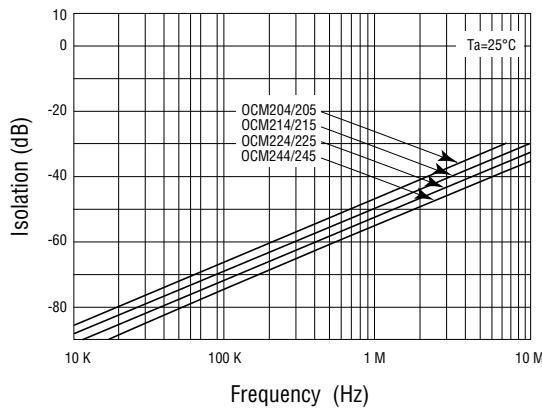

- Insertion Loss

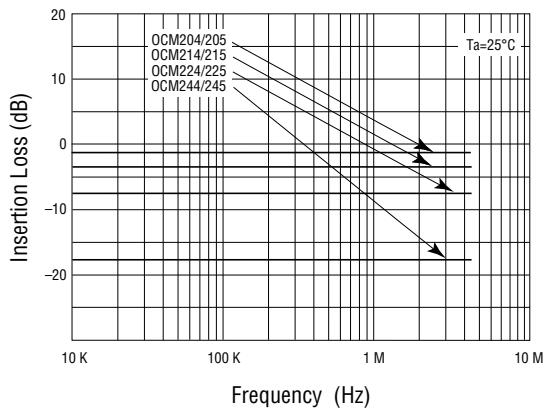

- Load Current vs. Voltage

