



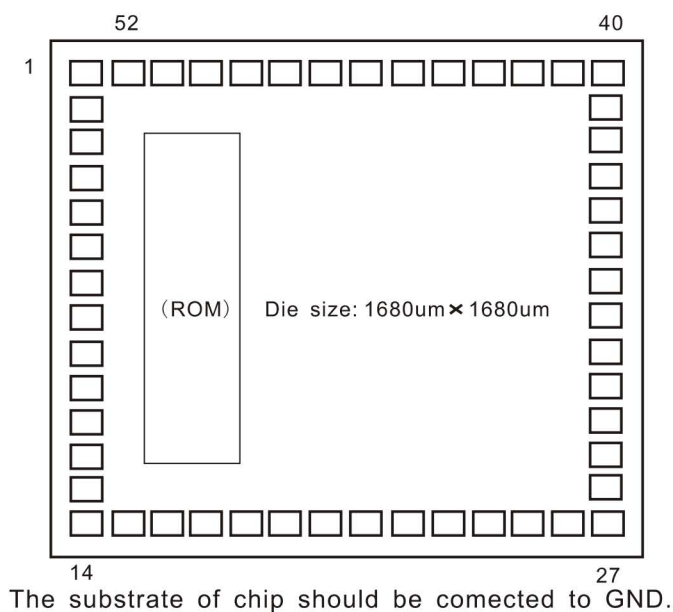

NO	NAME	X	Y	NO	NAME	X	Y
1	BAK	77.5	1602.5	27	N. C.	1602.5	77.5
2	XIN	77.5	1472.5	28	N. C.	1602.5	207.5
3	XOUT	77.5	1357.5	29	N. C.	1602.5	322.5
4	GND	77.5	1242.5	30	N. C.	1602.5	437.5
5	VDD1	77.5	1127.5	31	N. C.	1602.5	552.5
6	VDD2	77.5	1012.5	32	N. C.	1602.5	667.5
7	VDD3	77.5	897.5	33	N. C.	1602.5	782.5
8	CUP1	77.5	782.5	34	SEG20	1602.5	897.5
9	CUP2	77.5	667.5	35	SEG21	1602.5	1012.5
10	N. C.	77.5	552.5	36	SEG22	1602.5	1127.5
11	N. C.	77.5	437.5	37	SEG23	1602.5	1242.5
12	N. C.	77.5	322.5	38	IOA1	1602.5	1357.5
13	N. C.	77.5	207.5	39	IOA2	1602.5	1472.5
14	N. C.	77.5	77.5	40	N. C.	1602.5	1602.5
15	N. C.	207.5	77.5	41	IOA4	1472.5	1602.5
16	N. C.	322.5	77.5	42	IOB1	1372.5	1602.5
17	N. C.	437.5	77.5	43	IOB2	1242.5	1602.5
18	N. C.	552.5	77.5	44	IOB3	1127.5	1602.5
19	N. C.	667.5	77.5	45	N. C.	1012.5	1602.5
20	N. C.	782.5	77.5	46	IOC1	897.5	1602.5
21	N. C.	897.5	77.5	47	IOC2	782.5	1602.5
22	N. C.	1012.5	77.5	48	IOC3	667.5	1602.5
23	N. C.	1127.5	77.5	49	IOC4	552.5	1602.5
24	N. C.	1242.5	77.5	50	RESET	437.5	1602.5
25	N. C.	1357.5	77.5	51	INT	322.5	1602.5
26	N. C.	1472.5	77.5	52	N. C.	207.5	1602.5

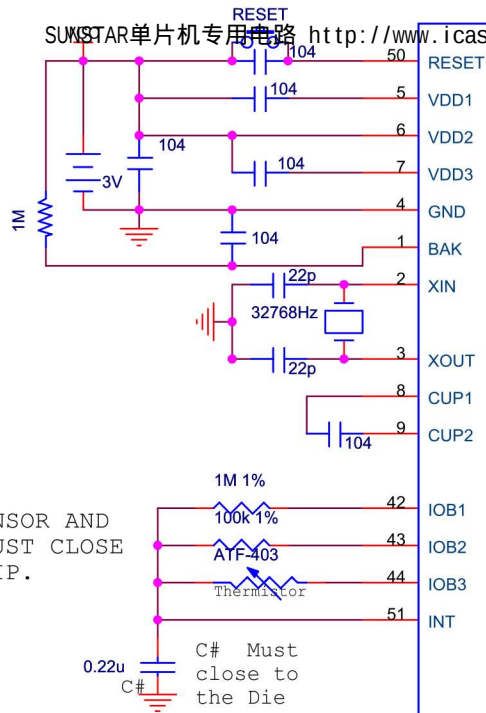


!! SENSOR AND
CAP MUST CLOSE
TO CHIP.

Temp Range
-50 ~ +70 Deg C

(Temp)


For:
DL230 , Use CH1 and CH2 only

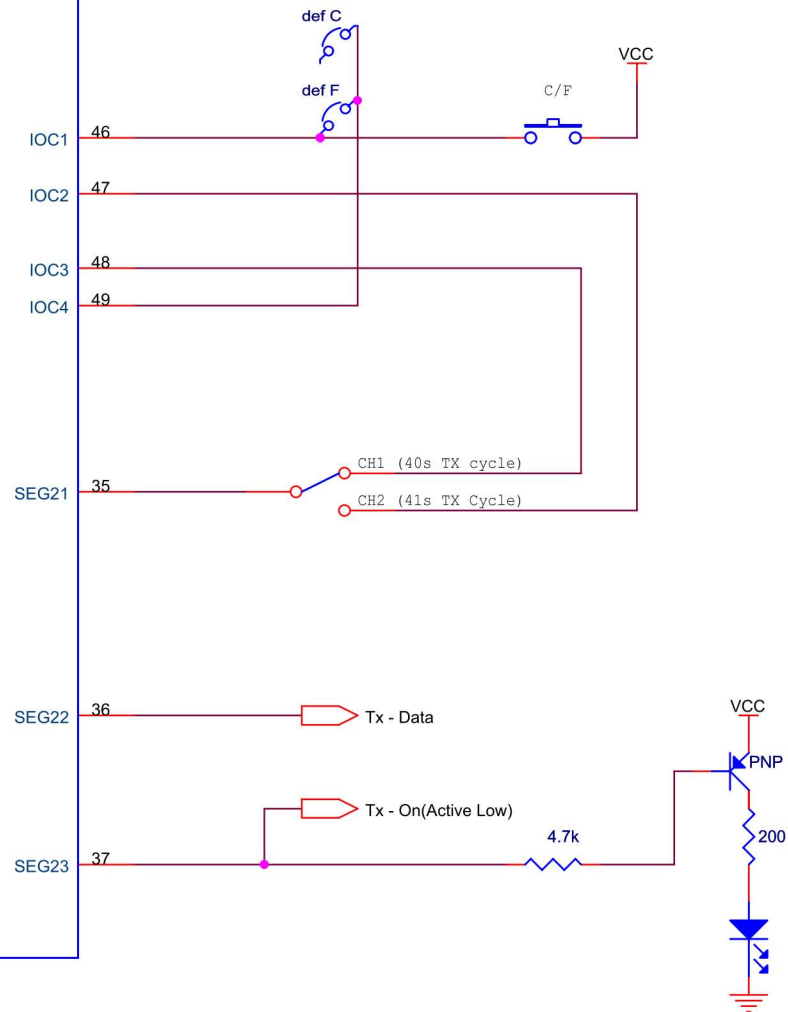


Title			
(Temp only)			
Size	Document Number		Rev
2	E-MAIL:SZSS20@163.com		1.1
Date:	Thursday, July 10, 2008	Sheet	1 of 1




RESISTOR
VALUES ARE FOR
REFERENCE ONLY

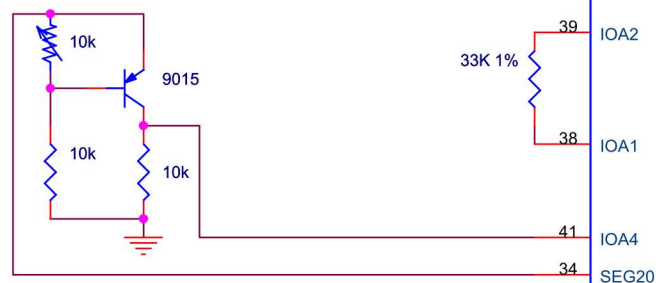


Temp)

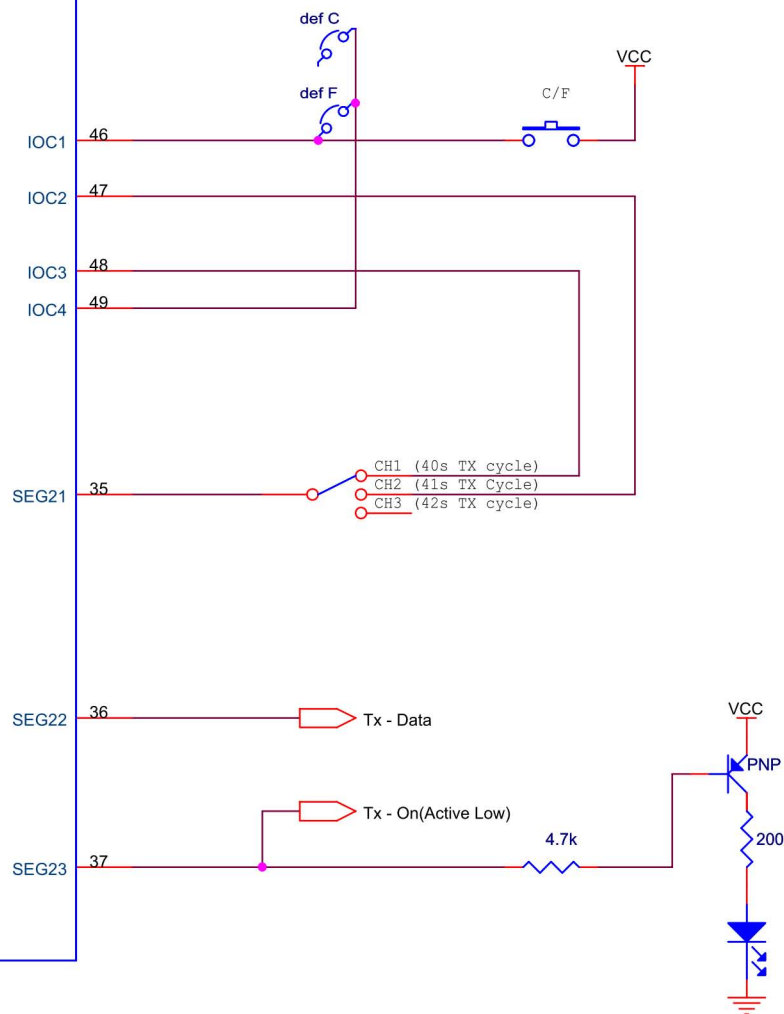



!! SENSOR AND
CAP MUST CLOSE
TO CHIP.

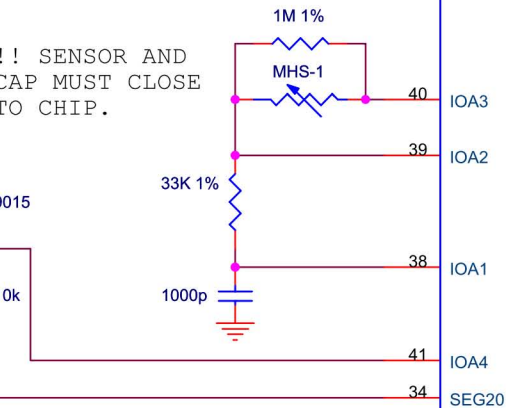

(Temp & Humid)

