


Contact Microphone CM-01

- High Sensitivity
- Robust
- Low Noise
- Piezo Film Technology
- Shielded Cable

The CM-01B Contact Microphone


uses sensitive but robust PVDF piezo film combined with a low-noise electronic preamplifier to provide a unique sound or vibration pick-up with buffered output. The design minimises external acoustic noise while offering extremely high sensitivity to vibration applied to the central rubber pad. The CM-01B is ideal for detecting body sounds.

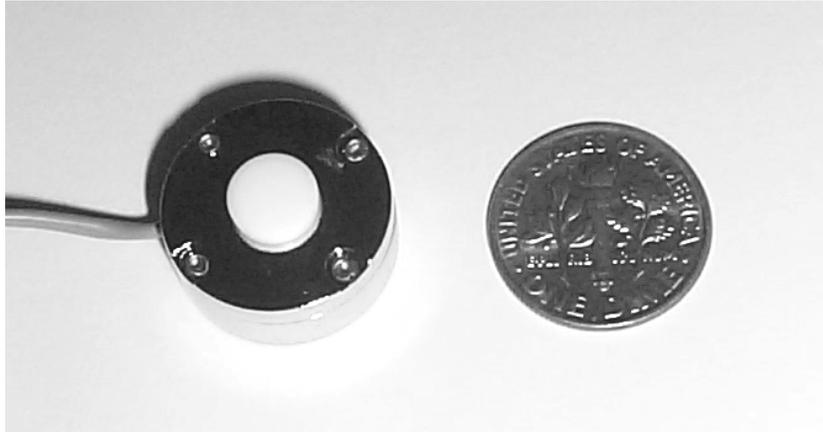

dimensions


FEATURES

- Broad Bandwidth
- High Sensitivity
- Excellent Impact Resistance
- Lightweight
- Low Cost

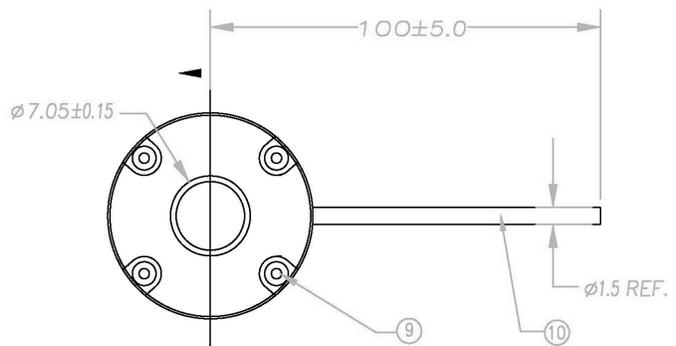

APPLICATIONS

- Electronic Stethoscope
- Bone-conducted Sound Pickup
- General Purpose Contact Microphone
- Vibration/Impact Sensing

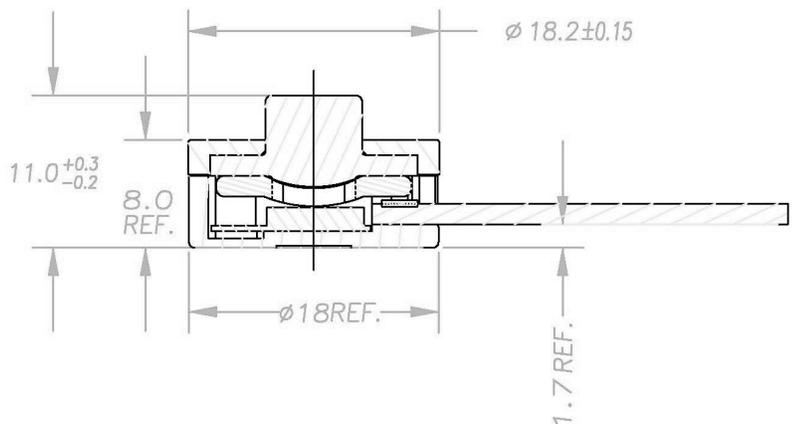


Contact Microphone CM-01

specifications

CHARACTERISTICS	Min	Typ	Max	Units
Sensitivity		40		V/mm
Lower Limiting Frequency (-3 dB)		8		Hz
Upper Limiting Frequency (+3 dB)		2.2		kHz
Resonance Frequency		5		kHz
Spring Constant		20		N/m
Electronic Noise		1		mV _{pk-pk}
Supply Voltage	4	5	30	V-DC
Supply Current		0.1		mA
Operating Temperature	+5		+60	°C
Storage Temperature	-20		+85	°C

typical frequency response


Typical Frequency Response

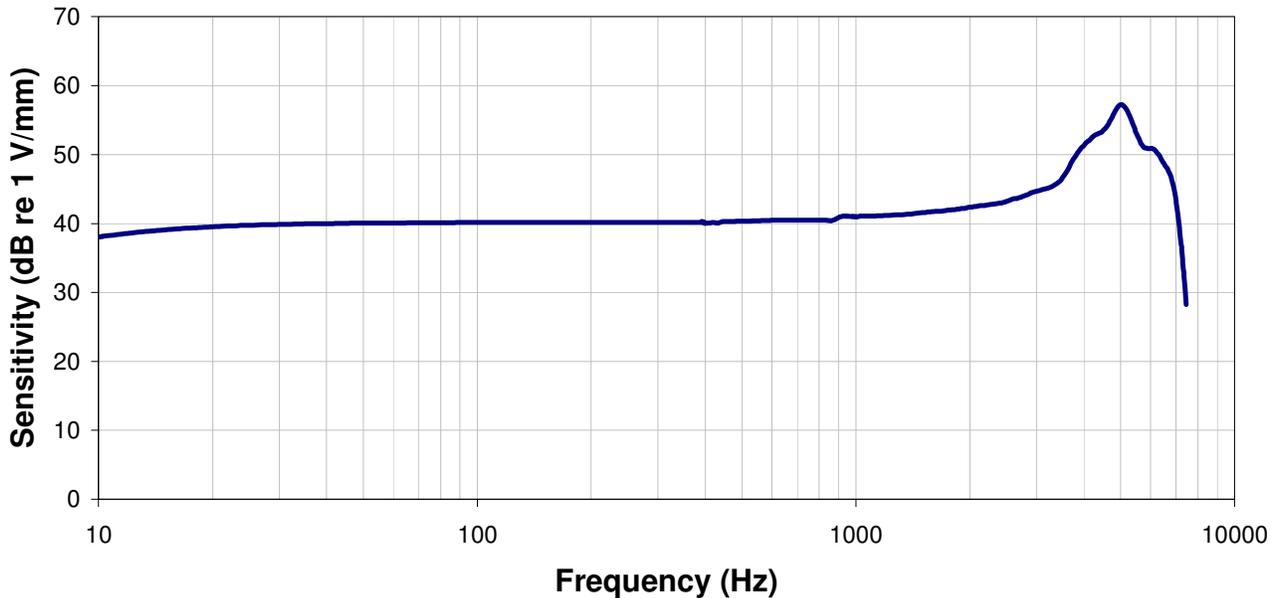

The above plot shows a typical frequency response curve for a device clamped below and subjected to piston-like displacement to the face of the rubber sensing pad.

Contact Microphone CM-01

internal schematic

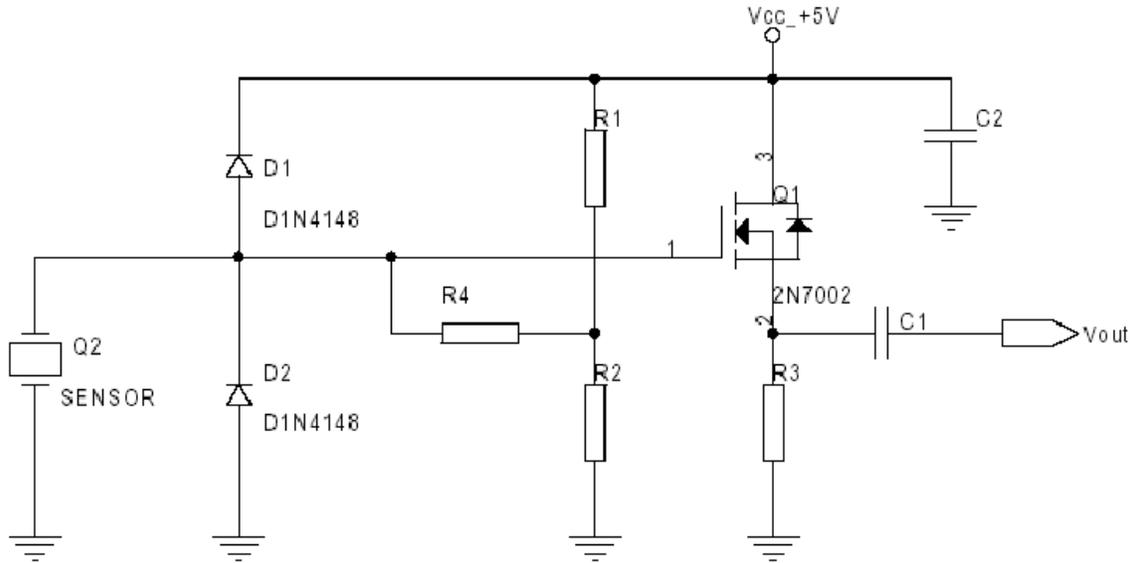

Shield (braid): GND
 Red wire: $V_{CC}, +5V$
 Yellow wire: V_{out}

$C1 = C2 = 0.1 \mu F$
 $R1 = R2 = 300K$
 $R3 = 10K$
 $R4 = 100M$

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering information

Model No.	Part No.
CM-01B	1007079-1