



## M5100 Heavy Industrial Pressure Transducer



- CE Compliance
- Wide Temperature Range
- Compact

### DESCRIPTION

The M5100 series pressure transducers from the Microfused™ line of MEAS, set a new price performance standard for demanding commercial and heavy industrial applications. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings, welds or organics exposed to the pressure media. The durability is excellent. The M5100 exceeds the latest heavy industrial CE requirements including surge protection, and is over voltage protected to 16Vdc in both positive and reverse polarity.

This product is geared to the OEM customer who uses medium to high volumes. The standard version is suitable for many applications, but the dedicated design team at our Transducer Engineering Center stands ready to provide a semi-custom design where the volume and application warrants.

### FEATURES

- Heavy Industrial CE Approval
- 100 V/m EMI Protection
- Reverse Polarity Protection
- Extended Temperature Range
- 1% Total Error Band
- Compact Outline
- -40°C to +125°C Operating Temperature Range

### APPLICATIONS

- Advanced HVAC Systems
- Refrigeration Systems
- Automotive Test Stands
- Industrial Process Control
- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- Agriculture Equipment
- Energy Generation and Management



# M5100 Heavy Industrial Pressure Transducer

## STANDARD RANGES

Range	psig	Range	Barg
0 to 50	•	0 to 3.5	•
0 to 100	•	0 to 7	•
0 to 200	•	0 to 10	•
0 to 300	•	0 to 20	•
0 to 500	•	0 to 35	•
0 to 1k	•	0 to 70	•
0 to 3k	•	0 to 200	•
0 to 5k	•	0 to 350	•
0 to 10k	•	0 to 700	•

DIN Range	Barg
0 to 4	•
0 to 6	•
0 to 10	•
0 to 16	•
0 to 25	•
0 to 40	•
0 to 60	•
0 to 100	•
0 to 160	•
0 to 250	•
0 to 400	•
0 to 600	•
0 to 1000	•

# M5100 Heavy Industrial Pressure Transducer

## PERFORMANCE SPECIFICATIONS

Supply Voltage: 5.0V, Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Accuracy (combined non linearity, hysteresis, and repeatability)	-0.25		0.25	%Span	1
Long Term Stability (1 year)	-0.25		0.25	%Span	
Total Error Band (over compensated range)			±1	%Span	2
Compensated Temperature	-20		+85	°C	
Operating Temperature	-40		+125	°C	
Storage Temperature	-45		+125	°C	
Burst Pressure	5X			Rated	
Vibration (20 to 200Hz)	±20			g	3
Shock (11ms)	50			g	4
Pressure Cycles (Zero to Full Scale)	10			Million	
Pressure Overload	2X			Rated	
Weight		82.2		grams	
Media Compatibility	All Materials Compatible with 17-4 Stainless Steel				

For custom configurations, consult factory.

### Notes

1. Best fit straight line.
2. TEB includes all accuracy errors, thermal errors, span and zero tolerances.
3. Per MIL-STD-810C, Procedure 514.2, Figure 514.2-2, Curve L.
4. 1/2 sine per MIL-STD 202F Method 213B condition A.

### CE Compliance

EN55022 Emissions Class A & B

IEC61000

IEC61000

IEC61000

IEC61000

IEC61000

IEC61000

IEC61000

### Pressure Port Options

2 = 1/4"-19 BSP Male

5 = 1/4"-18 NPT Male

F = 1/4"-19 BSP Female

Q = M10x1

S = M12x1.5

U = G1/4B DIN 3852

V = M14x1.5

Others available on request

### Electrical Connection Options

1 = 2 ft cable

4 = Packard Metripak 150

5 = Bendix PTIH-10-6P

6 = Hirschmann DIN 43650-C

D = 4-pin Binder Connector

M = 1 metres cable


P = 5 metres cable

R = 10 metres cable

Others available on request

# M5100 Heavy Industrial Pressure Transducer

## DIMENSIONS

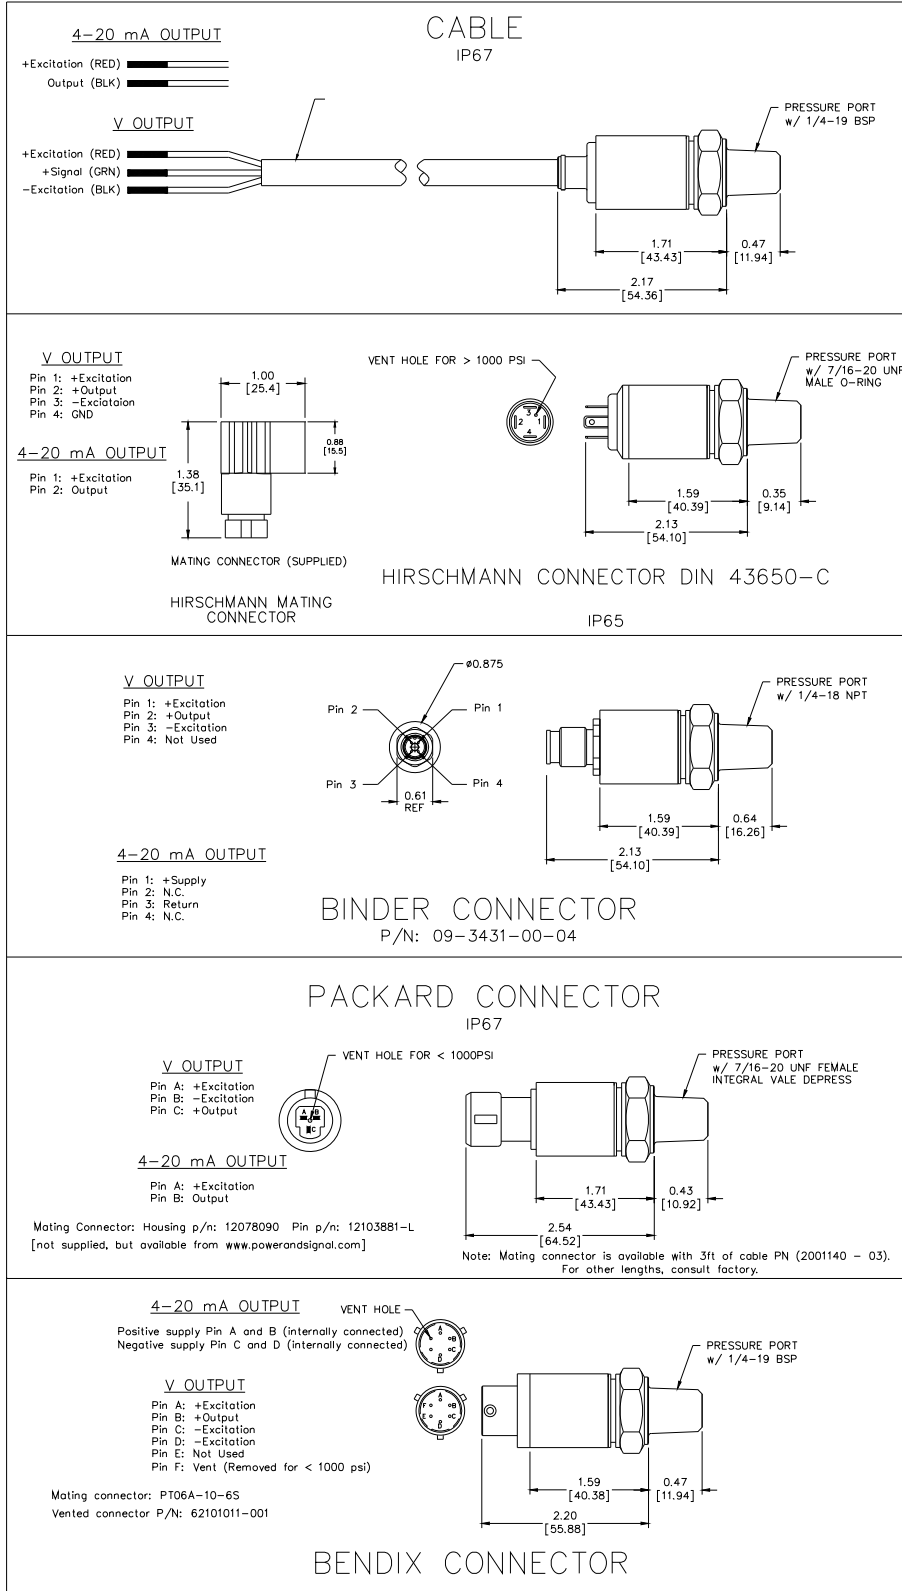


# M5100 Heavy Industrial Pressure Transducer

## OUTPUT OPTIONS

Code	Output	Supply(V)		
		MIN	TYP	MAX
3	0.5 – 4.5 V (ratiometric)	4.75	5	5.25
4	1 – 5 V	8		30
5	4 – 20 mA	9		30
6	0 – 5 V	8		30
7	0 – 10 V	15		30

## ORDERING INFORMATION

M5131-000005-300PG

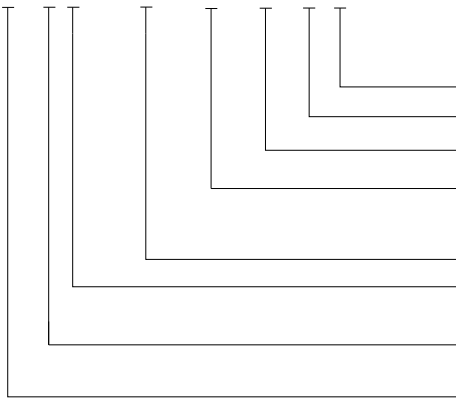

Type (G = Gage)  
 Units (P = psi, B = Bar)  
 Pressure Range (300 = 300, 05K = 5000, 3.5 = 3.5)  
 Pressure Port (2 = 1/4-19BSP, V = M14 x 1.5)  
 See Pressure Port Options Table  
 Specials (nnnnn = Custom Drawing)  
 Connection (4 = Packard Metripak 150, R = 10 metres cable)  
 See Electrical Connection Options Table  
 Output (3 = 0.5 to 4.5V, 4 = 1 - 5V, 5 = 4 - 20mA, 6 = 0 - 5V,  
 7 = 0 - 10V)  
 Model

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.