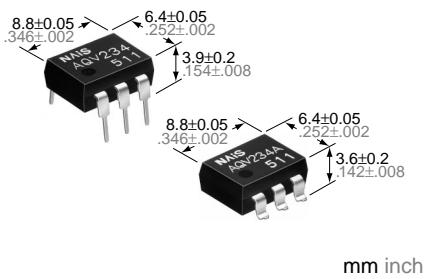


# NAIS

**HS (High Sensitivity) Type  
[1-Channel (Form A) Type]**

# PhotoMOS RELAYS



## FEATURES

1. **High sensitivity type**  
LED operate current: typical 0.31 mA
2. **Low-level off state leakage current (Typical 1 μA at 400 V load voltage)**
3. **Eliminates the need for a power supply to drive the power MOSFET**
4. **Low thermal electromotive force (Approx. 1 μV)**
5. **Extremely low closed-circuit offset voltages to enable control of small analog signals without distortion**
6. **Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side**

7. **Stable on resistance to help simplify circuit design**
8. **Surface-mount model available**

## TYPICAL APPLICATIONS

1. **High-speed inspection machines**
  - Scanner
  - IC checker
  - Board tester
2. **Telephone and data communication equipment**

## TYPES

Type	Output rating*		Part No.			Packing quantity		
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style	Tape and reel packing style	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube	Tape and reel
AC/DC type	400 V	120 mA	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

	Item	Symbol	Type of connection	AQV234(A)	Remarks	
Input	LED forward current	I <sub>F</sub>	A	50 mA		
	LED reverse voltage	V <sub>R</sub>		3 V		
	Peak forward current	I <sub>FP</sub>		1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P <sub>in</sub>		75 mW		
Output	Load voltage (Peak AC)	V <sub>L</sub>	A	400 V		
	Continuous load current	I <sub>L</sub>		0.12 A		
				0.13 A	A connection: Peak AC, DC B, C connection: DC	
				0.15 A		
	Peak load current	I <sub>peak</sub>	C	0.3 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC	
	Power dissipation	P <sub>out</sub>		500 mW		
Total power dissipation		P <sub>T</sub>		550 mW		
I/O isolation voltage		V <sub>iso</sub>		1,500 V AC		
Temperature limits	Operating	T <sub>opr</sub>		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperature	
	Storage	T <sub>stg</sub>		-40°C to +100°C -40°F to +212°F		

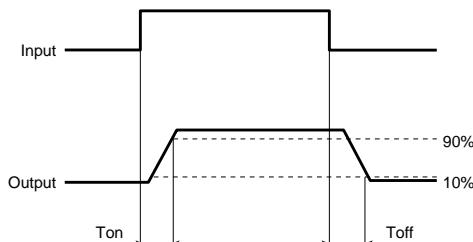
## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV234(A)	Remarks
Input	LED operate current	Typical	$I_{Fon}$	—	0.31 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ $I_L = 120 \text{ mA}$
		Maximum			0.5 mA	
	LED turn off current	Minimum	$I_{Foff}$	—	0.1 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ $I_L = 120 \text{ mA}$
		Typical			0.29 mA	
	LED dropout voltage	Typical	$V_F$	—	1.1 V (1.25 V at $I_F = 50 \text{ mA}$ )	$I_F = 2 \text{ mA}$
		Maximum			1.5 V	
Output	On resistance	Typical	$R_{on}$	A	30 Ω	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$ Within 1 s on time
		Maximum			50 Ω	
		Typical	$R_{on}$	B	22.5 Ω	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$ Within 1 s on time
		Maximum			25 Ω	
	Off state leakage current	Typical	$R_{on}$	C	11.3 Ω	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$ Within 1 s on time
		Maximum			12.5 Ω	
	Off state leakage current	Maximum	—	—	1 μA	$I_F = 0$ $V_L = 400 \text{ V}$
	Transistor characteristics	Switching speed	$T_{on}$	—	0.89 ms	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$
					2 ms	
		Turn off time*	$T_{off}$	—	0.22 ms	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$
					1 ms	
	I/O capacitance	Typical	$C_{iso}$	—	0.8 pF	$f = 1 \text{ MHz}$ $V_B = 0$
		Maximum			1.5 pF	
	Initial I/O isolation resistance	Minimum	$R_{iso}$	—	1,000 MΩ	500 V DC

Note: Recommendable LED forward current  $I_F = 2 \text{ mA}$ .

For type of connection, see Page 444.

\*Turn on/Turn off time




- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.

## REFERENCE DATA


## 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

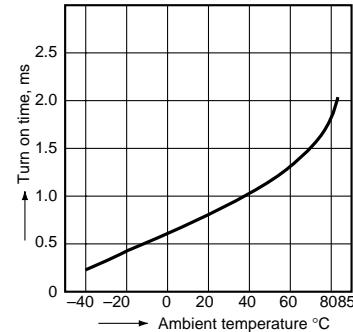
Type of connection: A



## 2. On resistance vs. ambient temperature characteristics


Measured portion: between terminals 4 and 6;  
LED current: 2 mA; Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

## 3. Turn on time vs. ambient temperature characteristics


LED current: 2 mA;  
Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**AQV234****4. Turn off time vs. ambient temperature characteristics**

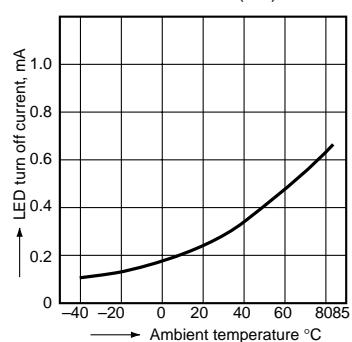
LED current: 2 mA; Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**5. LED operate current vs. ambient temperature characteristics**


Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**6. LED turn off current vs. ambient temperature characteristics**


Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**7. LED dropout voltage vs. ambient temperature characteristics**

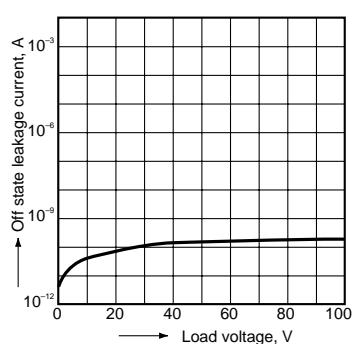
LED current: 2 to 50 mA

**8. Voltage vs. current characteristics of output at MOS portion**


Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

**9. Off state leakage current**


Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

**10. LED forward current vs. turn on time characteristics**

Measured portion: between terminals 4 and 6;  
Load voltage: 400 V (DC); Continuous load current:  
120 mA (DC); Ambient temperature: 25°C 77°F

**11. LED forward current vs. turn off time characteristics**

Measured portion: between terminals 4 and 6;  
Load voltage: 400 V (DC); Continuous load current:  
120 mA (DC); Ambient temperature: 25°C 77°F

**12. Applied voltage vs. output capacitance characteristics**

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

