

Trip amplifier



2231

- AC/DC trip amplifier
- 2 adjustable alarm limits
- Galvanically isolated 3.75 kVAC
- Front-programmable
- 3-digit LED display
- 24 VDC or universal supply



Advanced features

- The front-operated push buttons are used for programming the different standard functions.
- A password can prevent access for changing parameters.


Application

- Alarm detector in connection with measurement of AC/DC current or voltage signals.
- The unit is used where accurate setpoint setting and different alarm functions are required.
- The unit can be used as a single or dual trip amplifier.
- Used in applications where programmable parameters such as hysteresis, setpoint, reset, active relay for increasing or decreasing signal, delay and input signal need to be set.

Technical characteristics

- 3-digit display showing the input signal in %.
- Two LED indicating relay status.
- 3 pushbuttons for programming.
- Standard DC current input signals in the range 0...20 mA.
- DC voltage signals in the range 0...250 VDC.
- AC current signals up to 1 A.
- True RMS measurement of AC voltage signals in the range 0...250 VAC.
- Mounting for a standard 11-pole socket which can be adapted for DIN rail or plate use with PR's 7023 adaptor and 7024 mounting keying.

Connections

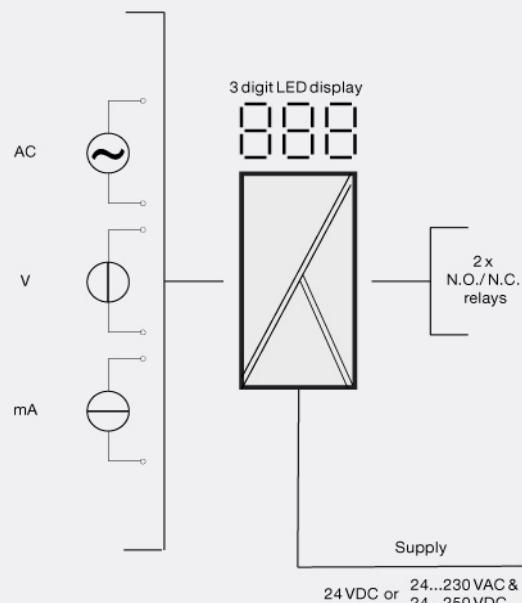

Order:

Type	Supply
2231	24 VDC : D 24...230 VAC / : P 24...250 VDC

Environmental Conditions

Specifications range..... -20°C to +60°C
 Calibration temperature..... 20...28°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree..... IP50

Mechanical specifications

Dimensions (HxWxD)..... 80.5 x 35.5 x 84.5 mm (D is without pins)
 Weight DC / universally supplied..... 125 g / 175 g

Common specifications

Supply voltage..... 19.2...28.8 VDC
 Supply voltage, universal..... 21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
 Internal consumption..... 1.5 W (2231D)
 Internal consumption..... 2 W (2231P)
 Isolation voltage, test / working..... 3.75 kVAC / 250 VAC
 Response time (programmable)..... 0.25...60 s (DC)
 Response time (programmable)..... 0.75...60 s (AC)
 Updating time..... 100 ms
 Signal dynamics, input..... 16 bit
 Effect of supply voltage change..... < ±0.002% of span / %V
 Temperature coefficient..... < ±0.01% of span /°C (DC signals)
 Temperature coefficient..... < ±0.02% of span /°C (AC signals)
 Linearity error..... < 0.1% of span
 Linearity error..... < ±0.35% of span 50...1000 Hz (AC sine wave signals)
 EMC immunity influence..... < ±0.5%

Input specifications

Max. offset..... 50% of selected max. value
 Current input: Measurement range..... 0...20 mA
 Min. measurement range (span), current input..... 10 mA
 Input resistance, current input..... 50 Ω
 AC current input: Measurement range..... 0...1 ARMS
 Min. measurement range (span), AC current..... 0.5 ARMS
 Input resistance, AC current..... 1 Ω / 2 W
 Voltage input: Measurement range..... 0...250 VDC
 Min. measurement range (span), voltage input..... 0.5 VDC
 Input resistance, voltage input..... Nom. 5 MΩ
 AC voltage input: Measurement range..... 0...250 VRMS
 Min. measurement range (span), AC voltage..... 0.5 VRMS
 Input resistance, AC voltage..... Nom. 5 MΩ

Output specifications

Relay outputs: Setpoint setting..... 0...99.9% of span
 Hysteresis..... 0...99.9% of span
 Updating time..... 100 ms
 ON and OFF delay..... 0.0...99.9 s
 Max. voltage..... 250 VRMS
 Max. current..... 2 AAC
 Max. AC power..... 500 VA
 Max. load at 24 VDC..... 1 A
 *of span..... = of the presently selected range

Approvals

EMC..... EN 61326-1
 LVD..... EN 61010-1
 PELV/SELV..... IEC 364-4-41 and EN 60742
 GOST R..... Yes