


CUSTOMER CODE

JUN ZE

CUSTOMER NO.

请确认此型号所有图纸，签字确认：

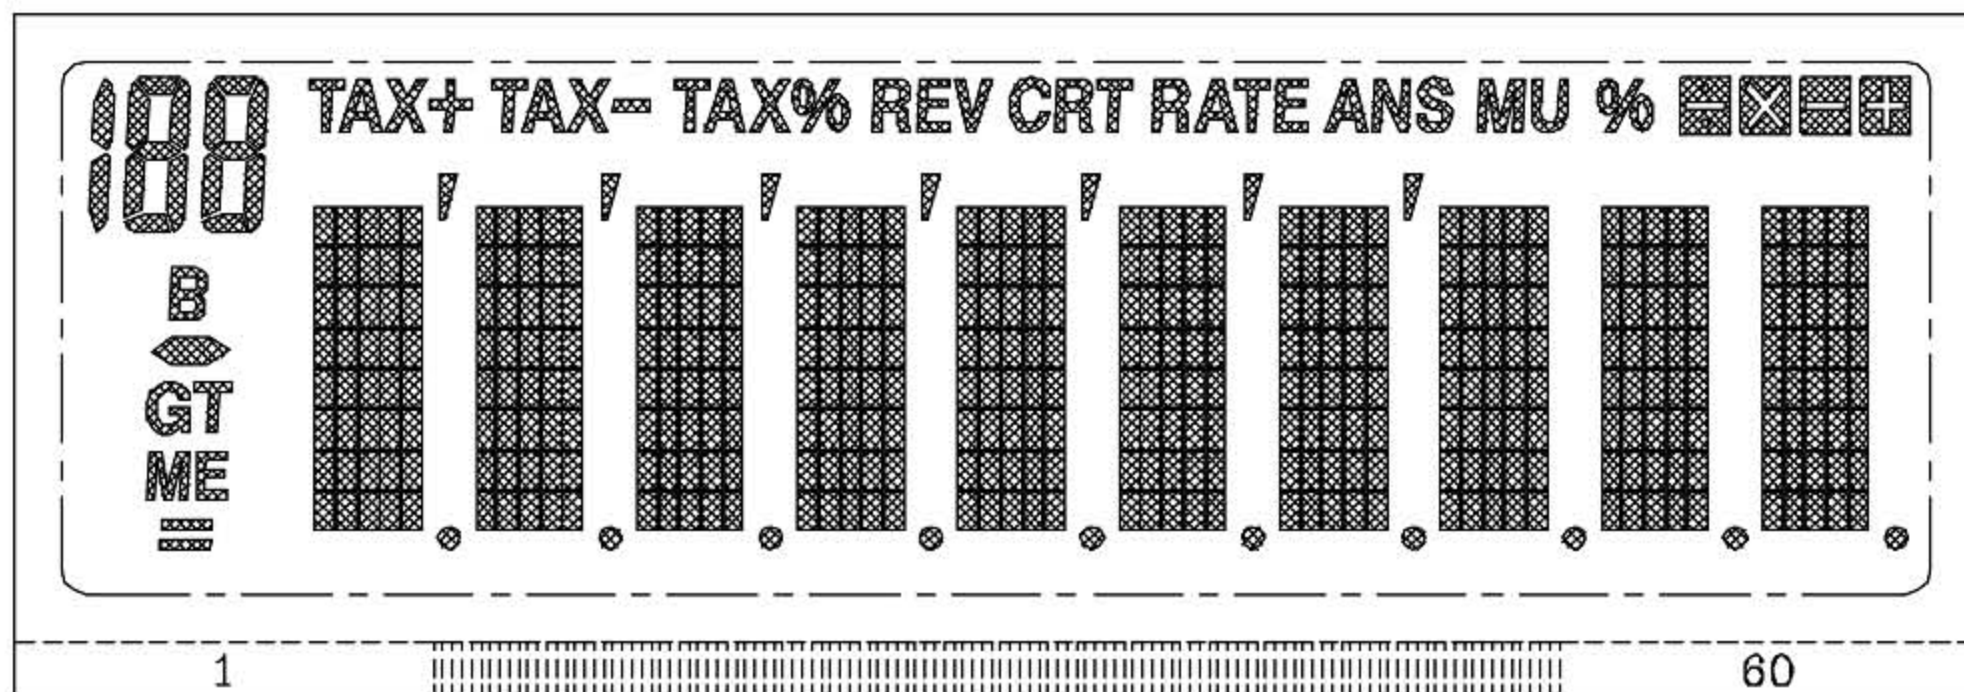

显示效果图

1. DISPLAY TYPE	■ TN □ HTN □ STN	4. DRIVE METHOD	1/8DUTY 1/3BIAS	NAME	DATE	DRAWING NO.	
DISPLAY SIZE	83.0X29.0/28.5	5. OPERATING VOLTAGE	3.0V	DRAWING1 BY	PENG	2009.05.25	
2. VIEWING DIRECTION	80° CLOCK	6. OPERATING TEMP	0°C~50°C	DRAWING2 BY			
3. FRONT POLARIZER	POSITIVE	7. STORAGE TEMP	-10°C~60°C	CHECKED BY			
4. REAR POLARIZER	REFLECTIVE	8. CONNECTOR	■ ZEBRA □ HEAT SEAL □ PIN TYPE	APPROVED BY	SUO		
DATA RESERVE						TOLERANCE: ±0.2	UNIT: mm
D:\PNG\HP						ANGLES: ±0.5°	SCALE: NTS
							SHEET: 3/3
							SIZE: A4



1. DISPLAY TYPE	■ TN □ HTN □ STN	4. DRIVE METHOD	1/9DUTY 1/3BIAS		NAME	DATE	DRAWING NO.				
DISPLAY SIZE	83.0X29.0/28.5	5.OPERATING VOLTAGE	3.0V	DRAWING1 BY	PENG	2008.05.25					
2. VIEWING DIRECTION	60° CLOCK	6.OPERATING TEMP	0°C~50°C	DRAWING2 BY							
3. FRONT POLARIZER	POSITIVE	7.STORAGE TEMP	-10°C~60°C	CHECKED BY							
				APPROVED BY	SUO		DATA RESERVE	TOLERANCE:±0.2	UNIT: mm	SHEET:1/3	
4. REAR POLARIZER	REFLECTIVE	8.CONNECTOR	■ ZEBRA □ HEAT SEAL □ PIN TYPE					D:\DWG\HP	ANGLES:±0.5°	SCALE: NTS	SIZE:A4



仅供走线参考


1. DISPLAY TYPE	☒ TN ☐ HTN ☐ STN	4. DRIVE METHOD	1/9DUTY 1/3BIAS		NAME	DATE	DRAWING NO.				
DISPLAY SIZE	83.0X29.0/28.5	5.OPERATING VOLTAGE	3.0V	DRAWING1 BY	PENG	2009.05.25					
2. VIEWING DIRECTION	60° CLOCK	6.OPERATING TEMP	0°C~50°C	DRAWING2 BY							
3. FRONT POLARIZER	POSITIVE	7.STORAGE TEMP	-10°C~60°C	CHECKED BY							
				APPROVED BY	SUO		DATA RESERVE	TOLERANCE:±0.2	UNIT: mm	SHEET:2/3	
4. REAR POLARIZER	REFLECTIVE	8.CONNECTOR	☒ ZEBRA ☐ HEAT SEAL ☐ PIN TYPE					DWG\HR	ANGLES:±0.5°	SCALE: NTS	SIZE:A4

CUSTOMER CODE

JUN ZE

CUSTOMER NO.

请确认此型号所有图纸，签字确认：

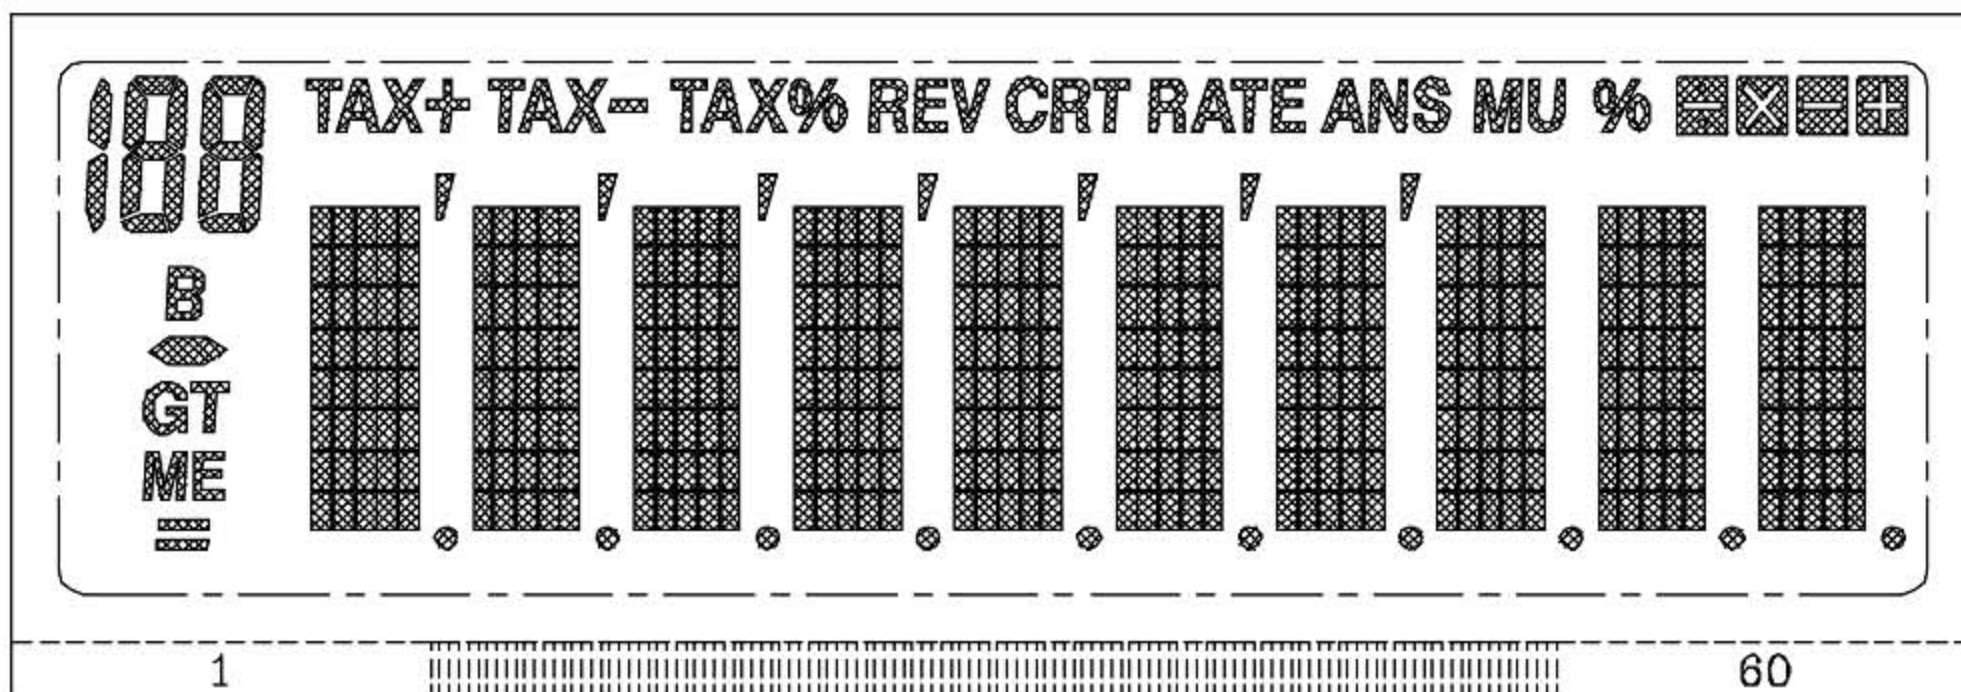






显示效果图

1. DISPLAY TYPE	■ TN □ HTN □ STN	4. DRIVE METHOD	1/8DUTY 1/3BIAS	NAME	DATE	DRAWING NO.			
DISPLAY SIZE	83.0X29.0/28.5	5. OPERATING VOLTAGE	3.0V	DRAWING1 BY	PENG				
2. VIEWING DIRECTION	80' CLOCK	6. OPERATING TEMP	0°C~50°C	DRAWING2 BY		DATA RESERVE			
3. FRONT POLARIZER	POSITIVE	7. STORAGE TEMP	-10°C~60°C	CHECKED BY					
4. REAR POLARIZER	REFLECTIVE	8. CONNECTOR	■ ZEBRA □ HEAT SEAL □ PIN TYPE	APPROVED BY	SUO	TOLERANCE: ±0.2		UNIT: mm	SHEET: 3/3
SUNSTAR单片机专用电路 http://www.icasic.com/ TEL: 0755-83387030 FAX: 0755-83376182 E-MAIL: szss20@163.com						D:\PNG\HP		ANGLES: ±0.5°	SCALE: NTS
								SIZE: A4	

TOP VIEW

LCD9*51

- 1.工作电压1.5V
- 2.R1 1M +/-5%
- 3.电容精度+/-20%
- 4.LCD工作电压3V 1/9duty,1/3baits
5. LCD Pin为示意描述, PCB根据实际LCD图纸确定
6. SW1/SW2 为拨码开关,默认为悬空
7. SW3 为Bonding Option, 默认为悬空

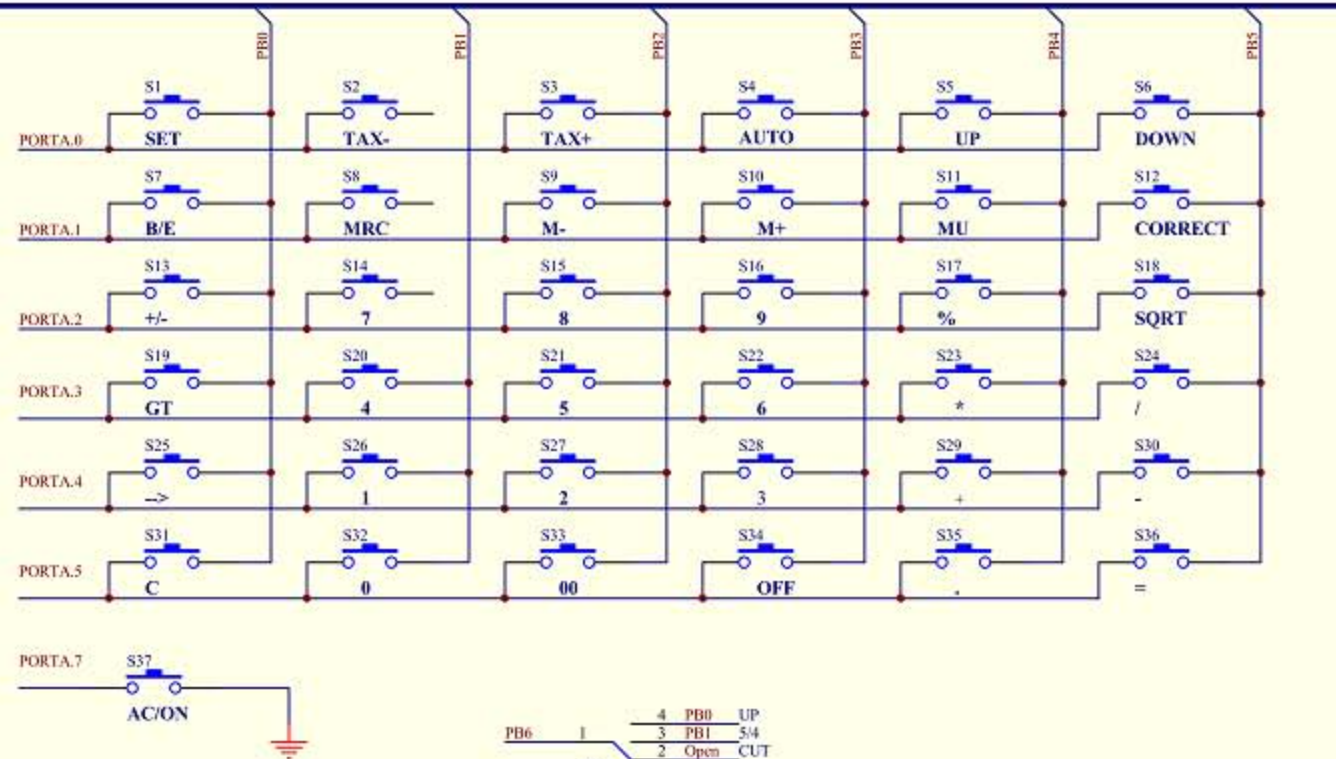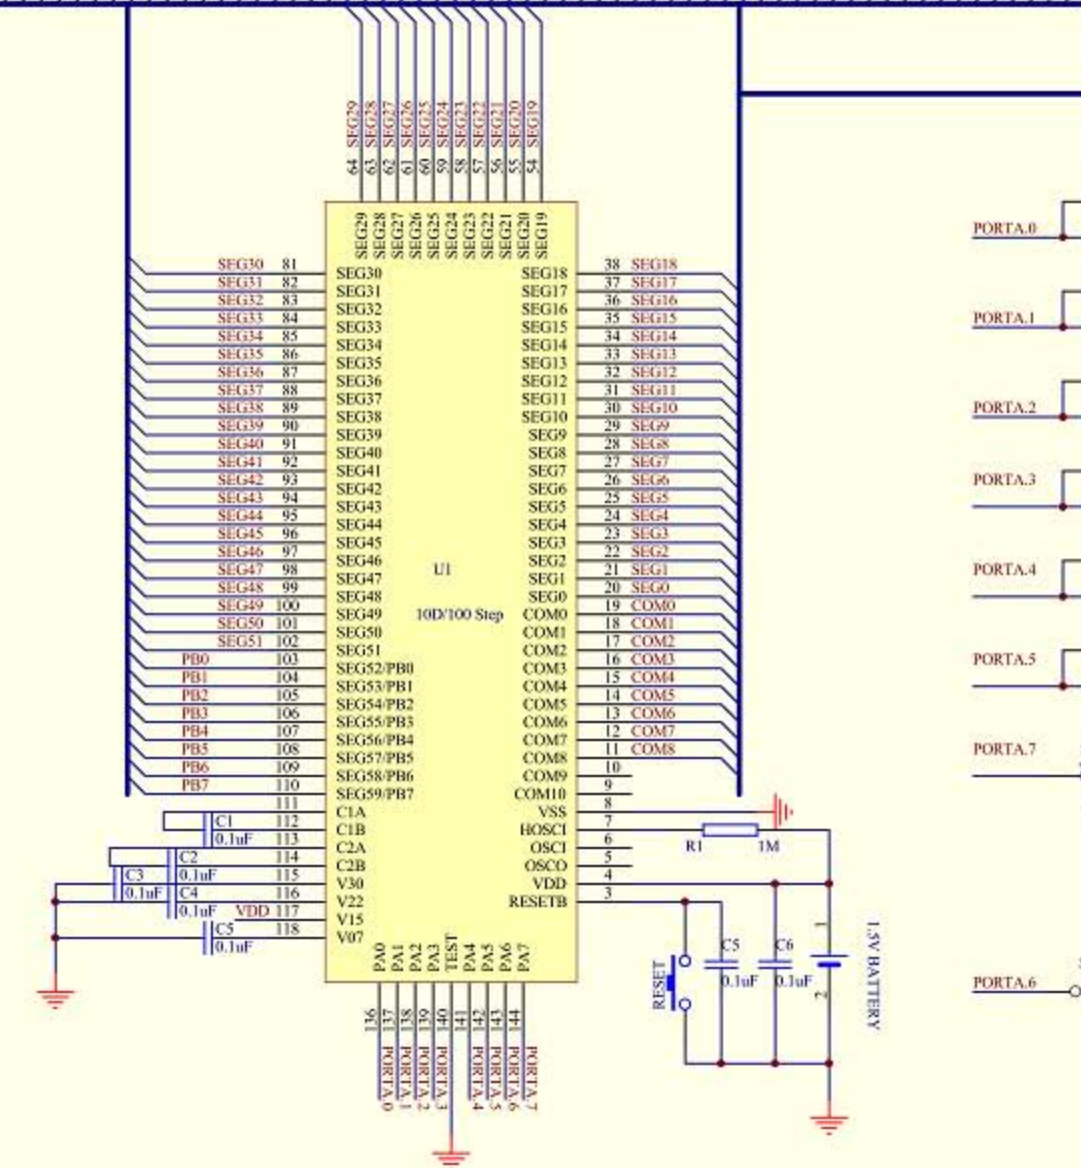

Title		
10D 120/100 step Calc		
Size	Number	Revision
B		V1.1
Date:	15-Jul-2009	Sheet of
File:	D:\Eplan\Jr-X10\Hardware\JR-X10.Ddb	Drawn By: Sefer

