

Clairair Ltd
Sensor People

Cirius 2

Miniature Infrared Gas Sensor
for Carbon Dioxide



Patented GB2449433

Features

- Latest technology MEMS detectors
- Typical Sensing ranges: 0-5000ppm Carbon Dioxide to 0-5% volume Carbon Dioxide
- Absolute limit ranges: 0-2000ppm Carbon Dioxide to 0-10%volume Carbon Dioxide
- All metal construction
- Patented sensor design
- Small internal volume
- Low power
- Active and Reference signal outputs
- Embedded thermistor temperature sensor output
- Wide operating temperature range
- Fast response
- Immunity from 'poisoning'
- Fail safe operation
- Electrically isolated housing


Description and Operation

The Cirius range of sensors use the non-dispersive infrared method to detect the presence of gases. The sensors contain an infrared radiation source, a dual element infrared detector and a unique optical waveguide into which gas diffuses. The dual element infrared detector responds to changes in incident radiation and to operate the sensor the infrared source should be pulsed with a duty cycle of 50% at a frequency typically between 2Hz and 4Hz. The sensor produces outputs for active wavelengths, which are modified by the presence of target gas, and for reference wavelengths, which are not modified by the presence of target gas. These outputs consist of a small AC signal in sympathy with the source pulse that is superimposed on a DC voltage pedestal. The sensor also provides a measure of internal temperature via an embedded thermistor. The sensor requires a voltage supply to operate the infrared detector and the connections to the sensor follow the industry standard 7 pin format.

To operate the sensor it must be connected to a suitable circuit that provides the source drive and extracts the small AC signals from the DC voltage pedestal. The circuit must amplify the small AC signals, extract a value from them and treat the results to provide a linear output related to gas concentration. The temperature output from the sensor should be used to apply temperature compensation in order to achieve the full performance specification. Technical support on implementation and application notes are available from Clairair Limited.

Outline Details

All dimensions in millimetres (± 0.1 mm unless noted)

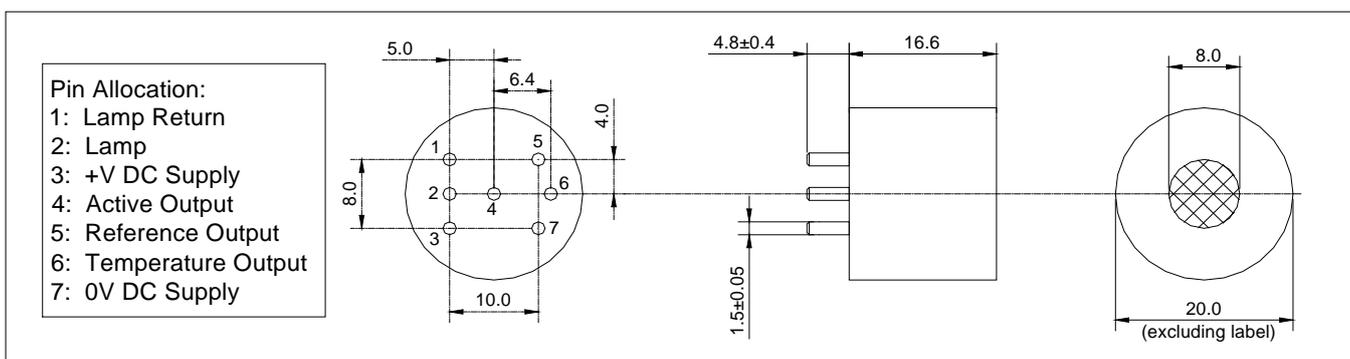

Little Braxted Hall, Little Braxted, Witham, Essex, CM8 3EU, U.K

Tel: +44 (0) 1376 516414, Fax: +44 (0) 1376 516415




Email: info@clairair.com Website: www.clairair.com

© Clairair Ltd 2010

DES2, Issue 5, Jan 2012

Response Characteristics

These plots illustrate the sensitivity versus concentration before linearisation. For further explanation, refer to the Infrared Sensor Application Notes available from Clairair Ltd.

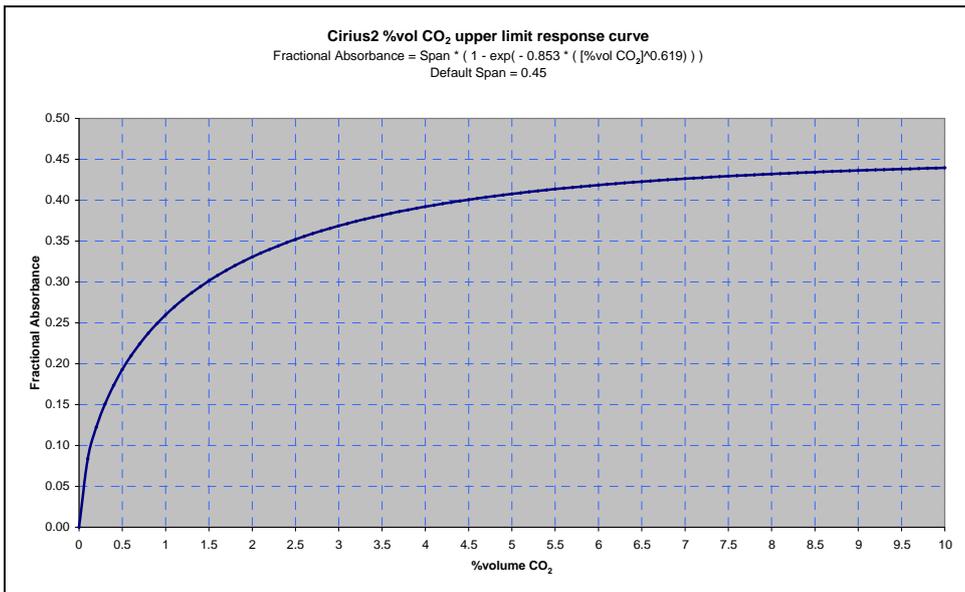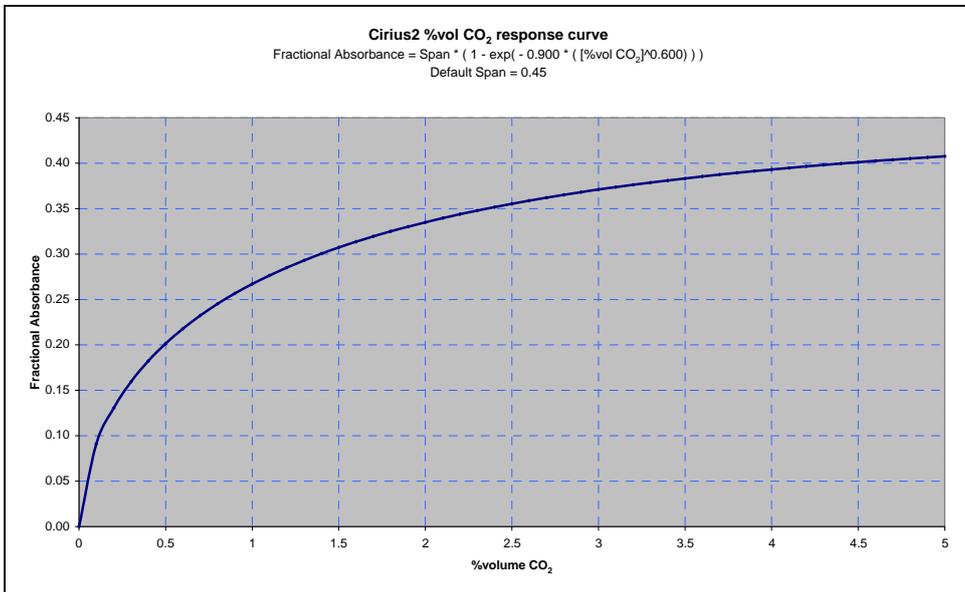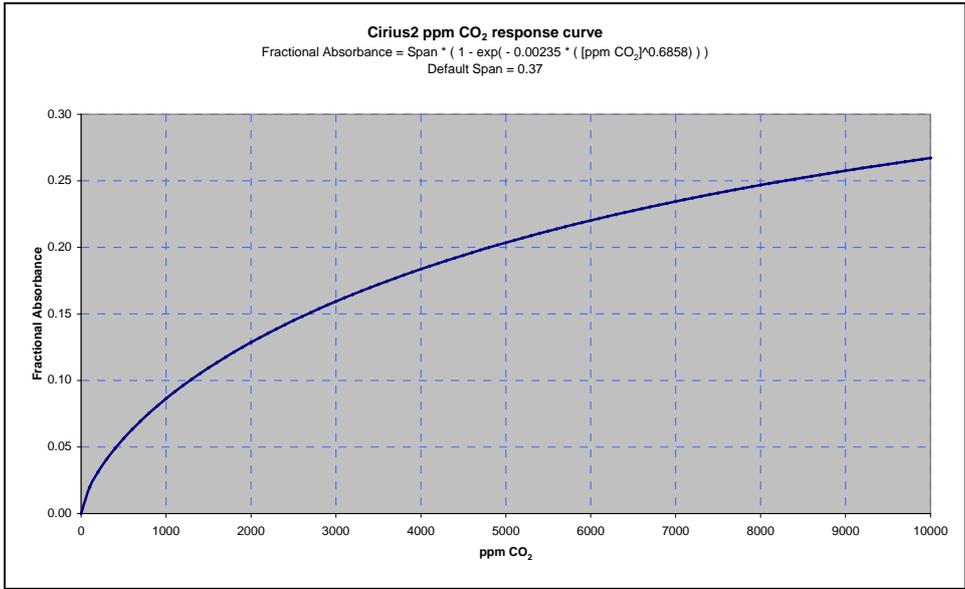

Little Braxted Hall, Little Braxted, Witham, Essex, CM8 3EU, U.K

Tel: +44 (0) 1376 516414, Fax: +44 (0) 1376 516415

Email: info@clairair.com Website: www.clairair.com

Absolute Maximum Ratings

Ambient temperature range: -40°C to +80°C

Supply voltage to source (measured between pins 1 and 2): 5.1V

Supply voltage to detector (measured between pins 3 and 7): 5.5V

Handling Precautions



Electrostatic Sensitive Devices

The Cirius range of sensors contain electrostatic sensitive components. Anti-static handling precautions should be observed when handling these products.

Soldering to pins may seriously damage the sensor

Connections should be made via PCB sockets only.

Suggested socket: Wearnes Cambion reference 450-3326-01-06-00

Performance

Unless otherwise stated all data was taken using: Supply voltage of 5.0V. Lamp modulation of 0V – 5.0V, 50% duty cycle, 3.0Hz. Ambient temperature (between 20°C and 25°C). Ambient pressure (between 995 hPa and 1020 hPa). Gases diluted in nitrogen. Gas Flowrate 1litre/min across sensor face.

| | |
|---|--|
| Power consumption: | 150mW typical |
| Typical active signal in nitrogen: | 4.4mV RMS (12.5mV p-p sinewave equivalent) |
| Typical reference signal in nitrogen: | 3.5mV RMS (10mV p-p sinewave equivalent) |
| Temperature output: | 3k ± 5% NTC thermistor internally connected to 0V. Beta value 3450K |
| Typical % drop in active signal: At 5% volume carbon dioxide | 35% |
| Response time (T ₉₀) | < 30s |
| Warm up time: To operation To specification | < 30s < 30 minutes |
| Nominal ranges: | 0 – 2000ppm carbon dioxide 0 – 5000ppm carbon dioxide 0 – 5% volume carbon dioxide |
| Minimum resolution: At zero At range | < 0.5% of range <2% of range |
| MTBF | > 5 years |
| Weight: | 17.6 grams |
| Vibration: | Complies with EN61779-1 |
| Relative humidity: | 0 – 95% RH non-condensing |
| Operating temperature range: | -30°C to +60°C |
| Operating pressure range: | 700 – 1300 hPa |
| Storage temperature range: | -40°C to +80°C |
| Supply voltage range: | 2.8V – 5.5V |
| Lamp drive voltage range: | 2.8V – 5.0V (50% duty cycle) |

In the interest of continued product improvement Clairair Ltd reserves the right to change the design features and specifications without prior notification. The data contained in this document is for guidance only. Whilst Clairair Ltd has taken care to ensure the accuracy of the information in this document it accepts no responsibility for the consequences of any use of this document or the information contained within it.

Little Braxted Hall, Little Braxted, Witham, Essex, CM8 3EU, U.K

Tel: +44 (0) 1376 516414, Fax: +44 (0) 1376 516415

© Clairair Ltd 2010

Email: info@clairair.com Website: www.clairair.com

DES2, Issue 5, Jan 2012