
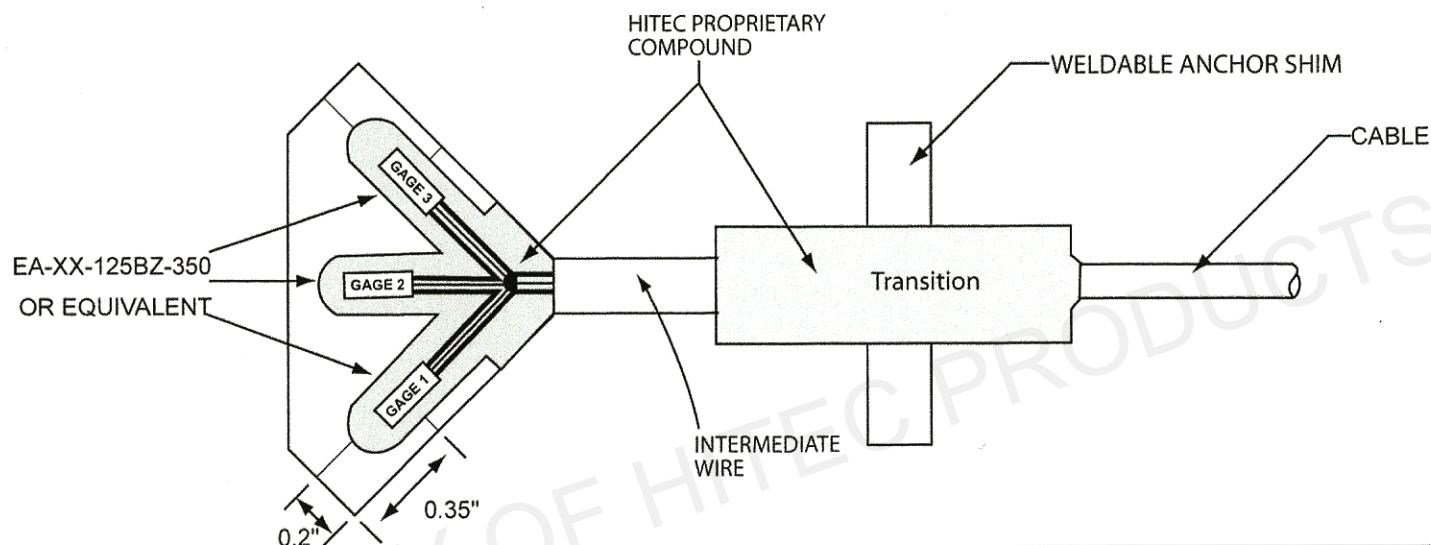




ACTIVE GRID AND WIRING (X3)

**GAGE 1**

GRN = P+
ORANGE = D-350
VIO = S-

GAGE 2

RED = P+
WHITE = S-
BLACK = D-350

GAGE 3

BRN = P+
YELLOW = S-
BLUE = D-350

SPECIFICATIONS				HITEC PRODUCTS, INC.	
SENSOR TYPE	(3) EA-XX-125BZ-350 or equivalent	TEMP. COMPENSATION	6ppm/°F (1018 steel)	GAGE DESCRIPTION: HBWR-35-125-6-UP-9 WIRE	
SENSOR ALLOY		STRAIN DESCRIPTION	Static	DRAWING NO.: 80-810	
SENSOR LENGTH	0.125"	MAX. OPERATING TEMP.	180°F		
GAGE FACTOR(nominal)	2.0	INTERMEDIATE WIRE	St. St. Hypo Tubing	APPROVED BY: 	DATE: 10/18/13
GAGE RESISTANCE(nominal)	350 Ohms	TRANSITION DIMENSIONS	None	CUSTOM DRAWING:	
CABLE TYPE	Shielded Polyurethane Jacket	SHIM MATERIAL	Standard		
CABLE LENGTH	Customer Specified	SHIM DIMENSION	1.06" X 1.06"		
ENCAPSULATION	100% Immersion tested in clear water	NOTES:			