



This "Cube" allows for mounting multiple sensors for Tri-axial measurements.

Compatible with the following Seika sensors:

- N or NB3 Inclinometers
- B or BDK Accelerometers


Customer specified combinations. Package comes factory assembled, sensors permanently mounted to cube as specified at time of order.



ATTENTION: When ordering an SW3 with an NV 6A (4-20mA) Signal Conditioner, please indicate ISOLATED ASSEMBLY; or NON-ISOLATED SENSOR ASSEMBLY with NV 4A ($\pm 4VDC$) or NV 8A (0-5VDC).

MATERIAL	Aluminum or POM
WEIGHT	2.75 Ounces (78 Gram)
WEIGHT + (3) SENSORS	App. 5.12 Ounces (145 Gram)

Figure 1: Dimensions (inches [mm])

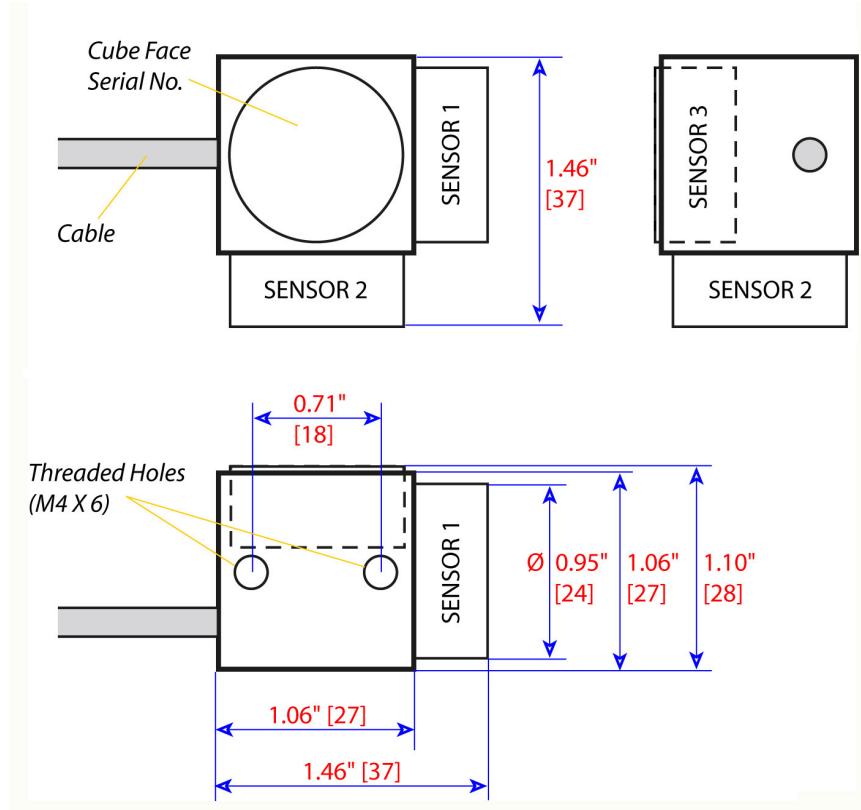

The information and material presented may not be published, broadcast, rewritten, or redistributed without the expressed written consent of Rieker Inc. ©2002-2011 Rieker Inc. All Rights Reserved. FORM NUMBER: SK0041_06/03 UPDATED: 04/11

34 MOUNT PLEASANT ROAD • ASTON • PA • 19014 • USA