

SPECTROTILT™ - *Analog Electronic Inclinometer*

The SPECTROTILT™ Analog Electronic Inclinometer is a fully signal conditioned, single axis tilt sensor. By combining a proprietary glass/ceramic hybrid electrolytic tilt sensor, with custom electronics, the SPECTROTILT™ rivals both the performance of higher priced sensors, and the cost of less capable solutions. Features include a +/-70 degree total sensing range, bipolar input/output, ESD and EMI protection, aluminum housing, all in a hermetically sealed package.

Designed to operate in the most physically demanding environments, this robust inclinometer is also ideal for numerous other applications.. The viscosity of the fluid inside the sensing element can be altered, to decrease susceptibility in high vibration environments. Custom sensing ranges, cable length/type and connectors are also available.




Applications

- Construction Equipment (Boom Angle, Safe Load Indicators)
- Road Graders and Pavers (Blade Angle)
- Wheel Alignment (Caster and Chamber measurement)
- Antenna Position (Satellite Dish Elevation Angle)

General Specifications

| | |
|----------------------------------|---|
| Input Voltage | +/-7 to +/15Vdc (unregulated) |
| Input Current | 0.5mA (nom.) |
| Output | +60mV/° (+/- 1%) |
| Null Output | 0.0Vdc, +/-10 mVdc |
| Repeatability | 0.05 degrees |
| Resolution | 0.001 degrees |
| Linear Range | +/-60 degrees |
| Total Range | +/-70 degrees |
| Linearity | <ul style="list-style-type: none"> • 0 to 10 deg. 0.1 degrees • 10 to 60 deg. 1% of reading • 60 to 70 deg. monotonic |
| Temperature Range | <ul style="list-style-type: none"> • operating -40° to +70° C • storage -55° to +80° C |
| Temp. Coefficient of Null | 0.008 deg./C° |
| Temp. Coefficient of Scale | 0.1% / C° |
| Start-up Time | <1 second |
| Weight | 80 grams |

Physical Dimensions (inches)

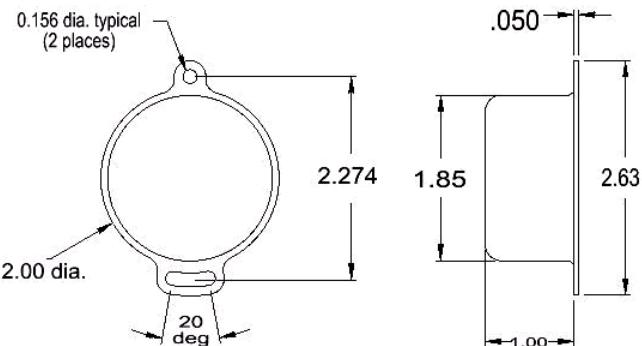

• vertical mounting shown!

Electrical Connections

| | |
|----------|--------------------------------------|
| Black = | Ground (common) |
| Red = | +7 to +15Vdc input (unregulated) |
| Gray = | -7 to -15Vdc input (unregulated) |
| Yellow = | Output signal (referenced to Ground) |

Ordering Information

| Part Number | Description |
|-------------|------------------|
| SSY0185-HAS | Horizontal mount |
| SSY0185-VAS | Vertical mount |

SPECTRON SYSTEMS TECHNOLOGY INC.

595 OLD WILLETS PATH
HAUPPAUGE NY 11788
PHONE: 631 582-5600
FAX: 631 582-5671

spectron
glass and electronics incorporated

www.spectronsensors.com

Specifications are subject to change without notice!

SUNSTAR自动化 <http://www.sensor-ic.com/> TEL: 0755-83376489 FAX:0755-83376182 E-MAIL:szss20@163.com

Doc.# SDS-118 -0507