Quartz Longitudinal Measuring Pin Type 9243B

for Indirect Measurement of Forces in Machinery and Tools

Piezoelectric sensor for monitoring forces and strains in machines and tools. This compact, longitudinally sensitive pin is used for indirect measurement of dynamic and quasistatic forces. It is particularly suitable for sensing very large forces where installation space is limited.

- Indirect measurement of very large forces
- Preloaded mounting allows measurement of compressive and tensile forces
- Can be mounted at virtually any depth in the structure
- Suitable for mounting in structures subject to heavy vibration
- Ground-isolated version available as option

Description

The measuring pin is mounted with a precisely defined preload. The strain in the surrounding material is transferred via the end of the sensor to the quartz sensing element.

The electrical charge output is proportional to the change in mechanical strain. A charge amplifier converts the charge into a voltage signal that can be processed as required.

After being mounted in the structure as prescribed, the strain sensor must be calibrated by comparison measurement against a force calibration sensor, for example.

Application

The sensor could easily be mounted with a preloading bolt and allows measurement of the forces within a machine component or tool. It is used mainly for industrial monitoring of machinery forces (e.g. machine and tool monitoring) and tie bar forces in injection molding machines.



Technical Data


Range	με	-1 500 1 500
Overload	με	2 000
Axial preloading force	kN	≈16 (≈40 000 pC)
Sensitivity (in test object)	pC/με	≈–15
Sensitivity to force	pC/N	≈–2,5
(for preload)		
Reproducibility	%	<±1
of sensitivity when dismounting		
and remounting		
Linearity	%FSO	≤±1
Hysteresis	%FSO	≤2
Natural frequency	kHz	>110
Acceleration sensitivity	pC/g	<0,15
Operating temperature range	°C	-40 200
Insulation resistance at 20 °C	Ω	≥10¹³
Degree of protection		IP64
(with connected cable)		
Weight	g	4,8
(without cable and preloading bolt)		

Page 1/6

There are basically three different methods of mounting:

1. Standard: Mounting Hole with Flat Bottom

- Prepare the mounting hole as shown in Figure 1; the 9 mm ø end bearing surface for the sensor must be machined clean and flat (and if necessary finished with Type 1300A21 tool and blown out with clean compressed air).
- Grease (included in accessories) end and thread of the hollow preloading bolt sparingly.
- Mount and carefully preload the sensor to the stipulated value of 40 000 pC (≈16 kN) with the aid of the M10x1 hollow preloading bolt with the included accessories, using a suitable 8 mm tubular socket wrench such as the Type 1385A200.
- Check preloading force with the aid of a charge amplifier and an evaluation unit.



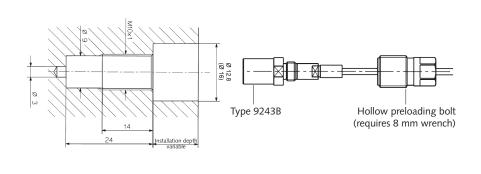


Fig. 1: Mounting hole with flat bottom

Fig. 2: Standard method of mounting the Type 9243B measuring pin

2. Option: Mounting Hole with Conical (120°) Bottom

- Prepare the mounting hole as shown in Figure 3; the 9 mm ø end bearing surface for the sensor must be machined clean and flat (and if necessary finished with Type 1300A21 tool and blown out with clean compressed air).
- Grease (included in accessories) end and thread of the hollow preloading bolt sparingly.
- Screw the Type 9481 domed thrust piece available as an option onto the head of the sensor to improve force introduction.
- Mount and carefully preload the sensor to the stipulated value of 40 000 pC (≈16 kN) with the aid of the M10x1 hollow preloading bolt with the included accessories, using a suitable 8 mm tubular socket wrench such as the Type 1385A200.
- Check preloading force with the aid of a charge amplifier and an evaluation unit.
- Please note that with this method of mounting the strain sensitivity is approximately 15 % lower than the calibrated value (see page 1).

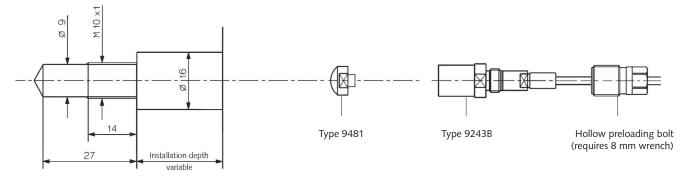


Fig. 3: Mounting hole with conical bottom

9243B 000-538e-08.05

Fig. 4: Mounting the Type 9243B measuring pin with domed thrust piece $\,$

Page 2/6

This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

©2005, Kistler Instrumente AG, PO Box, Eulachstr. 22, CH-8408 Winterthur Tel +41 52 224 11 11, Fax +41 52 224 14 14, info@kistler.com, www.kistler.com

3. Option: Mounting with Type 9487A Ground Isolation Kit (only for Mounting Hole with Flat Bottom)

The Type 9487A ground isolation mounting kit available as an option prevents electrical faults due to earth loops.

- Prepare the mounting hole as shown in Figure 1; the 9 mm ø end bearing surface for the sensor must be machined clean and flat (and if necessary finished with Type 1300A21 tool and blown out with clean compressed air).
- Grease (included in accessories) end and thread of the hollow preloading bolt sparingly.
- Put the specially coated thrust piece included in the Type 9487A mounting kit on the sensor head.
- Mount and carefully preload the sensor to the stipulated value of 40 000 pC (≈16 kN) with the aid of the specially coated type 9487A hollow preloading bolt included in the Type 9487A mounting kit, using a suitable 8 mm tubular socket wrench such as the Type 1385A200 as shown in Figure 5.
- · Check preloading force with the aid of a charge amplifier and an evaluation unit.
- Please note that with this method of mounting the strain sensitivity is approximately 11 % lower than the calibrated value (see page 1).

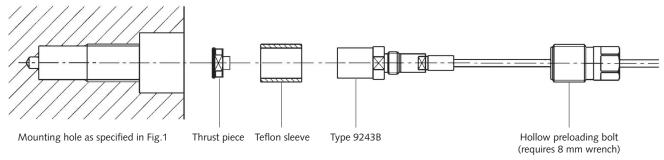


Fig. 5: Ground-isolated mounting of the longitudinal measuring pin (Type 9243B) with mounting kit (Type 9487A)

Mounting Examples

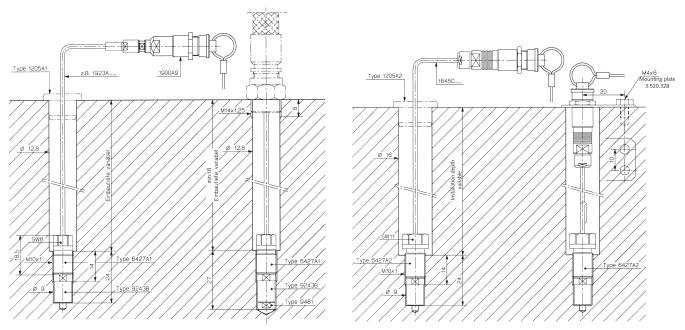


Fig. 6: Examples of different methods of mounting Type 9243B longitudinal measuring pin

Page 3/6


How high is its force sensitivity?

Solution

$$\sigma [N/mm^2] = \frac{F}{\Delta} = \frac{300\ 000\ N}{1\ 134\ mm^2} = 265\ N/mm^2$$

$$e \; [\mu\epsilon] \qquad = \qquad \frac{\Delta I}{I_0} \qquad = \qquad \frac{\sigma}{E} \qquad = \frac{265 \; N/mm^2}{200 \; 000 \; N/mm^2} \qquad \qquad = \; 1,32 \cdot 10^{-3} \; m/m \\ = \; 1'320 \; \mu\epsilon$$

1 [με] = 1 μm/m =
$$10^{-6}$$
 Strain (ΔΙ/ I_0)



Check

Is the calculated strain e within the measuring range?		
\rightarrow Yes, the measuring range is (see Technical Data)	=	±1 500 με

Calculation of the Force Sensitivity of the Built-In Sensor

$$S_e$$
 = Sensitivity of the sensor (see Technical Data) = -15 pC/ $\mu\epsilon$

Q =
$$e \cdot S_e$$
 = 1 320 μ m/m · (-15 pC/ μ ε) = -19 800 pC

$$S_F = \frac{Q}{F} = \frac{-19800 \text{ pC}}{300000 \text{ N}} = \frac{-0,066 \text{ pC/N}}{-66 \text{ pC/kN}}$$

Legend

Symbol	Meaning	Unit
F	Axial force	N
Α	Cross-sectional area at the mounting point	mm²
σ	Average mechanical stress at the mounting point	N/mm ²
E	Modulus of elasticity of the structural material	N/mm ²
e	Strain	με
Io	Length of the unloaded cylinder	m
ΔI	Change in length due to load F	m
S_{e}	Strain sensitivity of the sensor	ρC/με
Q	Electric charge	рС
S_{F}	Force sensitivity of the built-in sensor for forces acting in the cylinder axis	pC/N

Note

This calculation produces an approximation. The exact force sensitivity of the built-in sensor can only be determined by direct calibration on the object measured.

Page 4/6

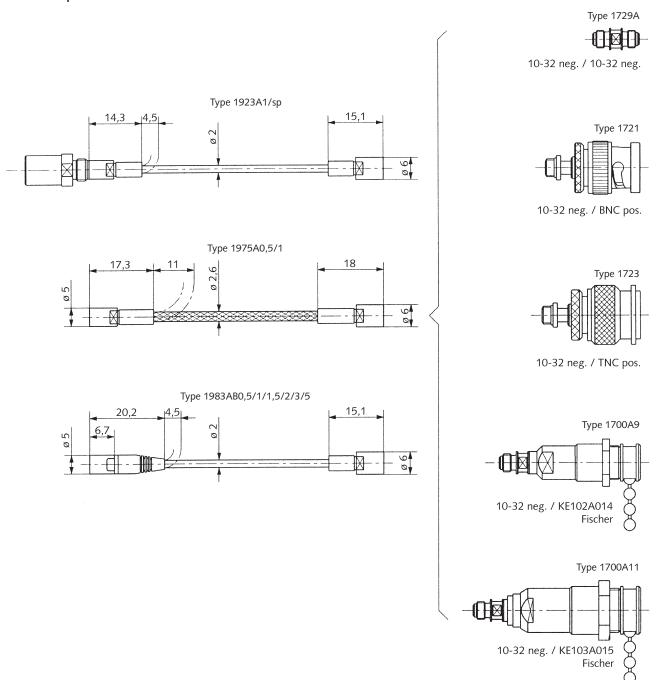


Fig. 7: Cable concept for longitudinal measuring pin Type 9243B

measure. analyze. i	nnovate.
---------------------	----------

Accessories Included	Type
 Hollow preloading bolt 	6427A1
(requires 8 mm wrench)	
 Rubber plug, ø 12,8 mm 	1205A1
• Grease	1063
Calibration certificate	

without Connecting Cable

Ordering Key

Type • M10 Quartz Longitudinal Measuring Pin 9243B

Optional Accessories

Type/Art.No.

• Tubular socket wrench, 8 mm (for hollow preloading bolt requiring this size) length = 200 mm 1385A200 • Tubular socket wrench, 8 mm 1385sp100-800 (for hollow preloading bolt requiring this size) with special length, please specify in mm $(L_{min} 100 \text{ mm/L}_{max} = 800 \text{ mm})$

• Hollow preloading bolt, 11 mm 6427A2 Tubular socket wrench, 11 mm 1387sp100-800 (for hollow preloading bolt requiring this size) with special length, please specify in mm) $(L_{min} = 100 \text{ mm/L}_{max} = 800 \text{ mm})$

• Rubber plug, ø 16 mm 1205A2 • Force introducing cap 9481 • Finishing tool 1300A21 · Preload tester 5991 • Ground isolation mounting kit 9487A • For connecting cables see cable concept on page 4