

## Chlorine Dioxide

### SensoriC ClO<sub>2</sub> 3E 1 O (unfiltered)



## SensoriC ClO<sub>2</sub> 3E 1 O

### FEATURES

Amperometric 3 electrode sensor cell  
Low susceptibility to abrupt changes of humidity  
Interference to Chlorine  
High selectivity  
0 voltage biased operation

### TYPICAL APPLICATIONS

Pulp & Paper Industry, Water treatment plants, Desinfection  
Portable and fixed point monitoring of TLV levels

### PART NUMBER INFORMATION

MINI	2731-331-30009
SENSORIC CLASSIC	2731-331-30069
CTL 4 series adaptation	2731-331-30049
CTL 7 series adaptation	2731-331-30079

Note:

It is recommended to cross calibrate with 1 –5 ppm chlorine

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



## SensoriC ClO2 3E 1 O

### TECHNICAL SPECIFICATIONS


Measuring Range	0–1 ppm
Sensitivity Range	600 nA/ppm ± 200 nA/ppm
Zero Current at 20°C	< ± 15 nA
Resolution at 20°C	< 0.03 ppm
Bias Potential	0 mV
Linearity	< 10% full scale
Response Time at 20°C	
t50	< 20 s calculated from 4 min. exposure time
t90	< 120 s (typically < 60 s), calculated from 4 min. exposure
Long Term Sensitivity Drift	<10% per 6 months
Operation Conditions	
Temperature Range	-20°C to +40°C
Humidity Range	15–90% r.H, non–condensing
Effect of Humidity	no effect
Sensor Life Expectancy	> 24 months in air
Warranty	12 months

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



## SensoriC ClO2 3E 1 O

**OUTPUT vs. TEMPERATURE:**  
(calibration has been done using 1 ppm Cl2 instead of ClO2)

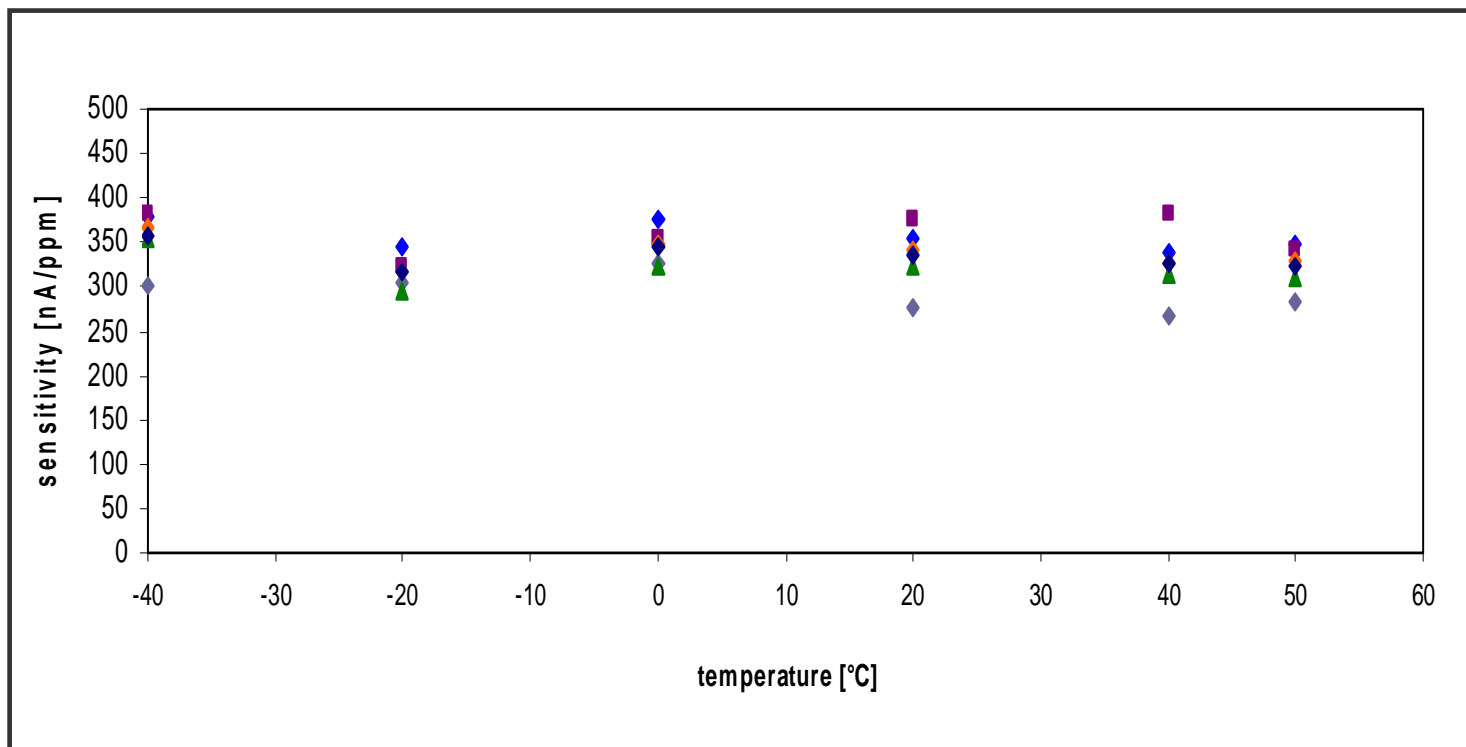


SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006

## SensoriC ClO2 3E 1 O

**ZERO READING vs. TEMPERATURE:**  
(calibration has been done using 1 ppm Cl2 instead of ClO2)

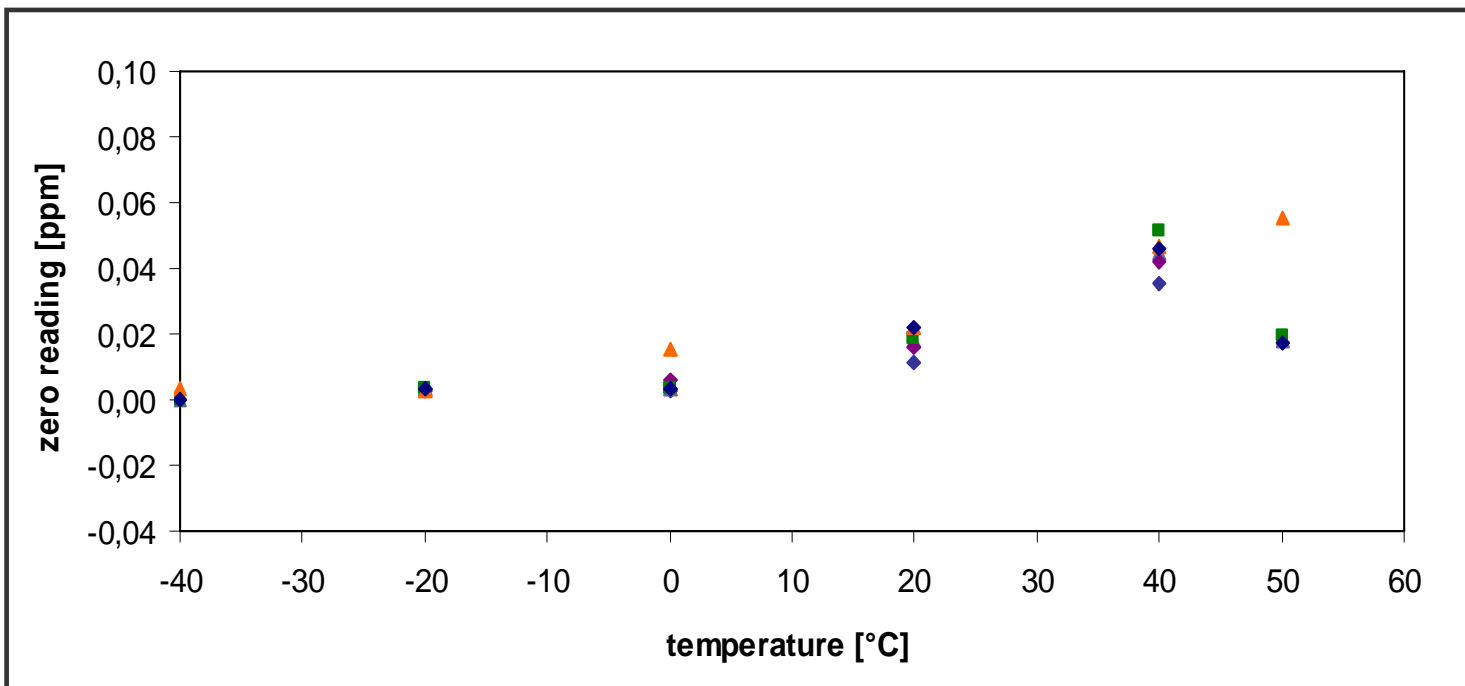

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006

## SensoriC ClO2 3E 1 O

### CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Alcohols	1000 ppm	0
Carbon Monoxide	100 ppm	0
Chlorine	1 ppm	0.6
Ozone	0.25 ppm	0.7
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	-5

Notes:

1. Interference factors may differ from sensor to sensor and with life time.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.
3. It is recommended to use 1 – 5 ppm Cl<sub>2</sub> for cross calibration.

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

